

ATC **Pacific** Under Sink Water Heaters



W5-U



W10-U

Key Features Include:

- Includes pressure relief valve for safe and easy installation
- Energy efficient
- Available in 2 sizes: 5L & 10L
- Power indicator light
- External adjustable thermostat control
- Includes wall bracket
- Comes with protective anode rod for maximum tank life
- Quick recovery element

Ideal for: Offices, Canteens, Mobile Homes, Apartments and Workshops



This compact undersink water heater is the ideal solution for commercial applications and can supply a number of sinks, depending on hot water demand, without the need for special taps. A cost effective solution compared to traditional vented systems.

Technical Details

Product Code	W5-U	W10-U
Capacity (L / Gal)	5L / 1.1Gal	10L / 2.2Gal
Power Watts (W)	2000W	2000W
Voltage (V)	220-240V	220-240V
Frequency (Hz)	50 / 60 Hz	50 / 60Hz
Max Pressure (Bar)	8 Bar	8 Bar
Connections	1/2"	1/2"
Thermostat	External	External
Approvals	UKCA, CE, RoHs	UKCA, CE, RoHs
ERP Class	B	B
IP Rating	IPX4	IPX4

Dimensions

W5-U


Height A	285mm
Width B	240mm
Depth C	240mm

W10-U

Height A	300mm
Width B	340mm
Depth C	330mm

Expansion Vessels for Water Heaters

Code	Description	Box Qty
KIT-A	2L Expansion Vessel with 1/2 " BSP for 5L, 10L & 15L Water Heaters	1

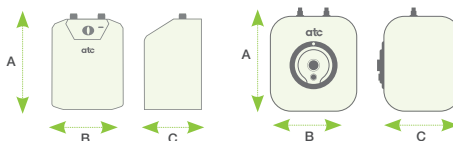

Recommended Selection Guide

Capacity of Water Heater

- 5 litres
- 10 litres
- 15 litres

Number of Basins

- 1 – 2
- 2 – 3
- 3 – 4

Heat up time

- 5 Litres – 11 mins*
- 10 Litres – 19 mins*
- *10° to 65°C

Note: These figures are for guidance only.



Commercial



Hospitality



Residential



Sports & Leisure



Education



Healthcare

UK
CA CE



ATC **Pacific** Under Sink Water Heaters



W15-U

Key Features Include:

- Includes pressure relief valve for safe and easy installation
- Energy efficient
- Power indicator light
- External adjustable thermostat control
- Includes wall bracket
- Comes with protective anode rod for maximum tank life
- Quick recovery element

Ideal for: Offices, Canteens, Mobile Homes, Apartments and Workshops



Technical Details

Product Code	W15-U
Capacity (L / Gal)	14L / 3 Gallons
Power Watts (W)	2500W
Voltage (V)	220-240V
Frequency (Hz)	50 / 60 Hz
Max Pressure (Bar)	8 Bar
Connections	1/2"
Thermostat	External
Approvals	UKCA, CE, RoHs
ERP Class	B
IP Rating	IPX4


Dimensions

W15-U

Height **A** 337mm

Width **B** 364mm

Depth **C** 354mm



Expansion Vessels for Water Heaters

Code	Description	Box Qty
KIT-A	2L Expansion Vessel with 1/2 " BSP for 5L, 10L & 15L Water Heaters	1

Recommended Selection Guide

Capacity of Water Heater	Number of Basins	Heat up time
5 litres	1 – 2	14 litres - 22 mins*
10 litres	2 – 3	*10° to 65°C
15 litres	3 – 4	

Note: These figures are for guidance only.



Commercial



Hospitality



Residential



Sports & Leisure



Education



Healthcare


UK
CA CE




Installation Information

Installation of commercial unvented water heaters and kit options

For Inlet water pressure up to 4.1 bar.

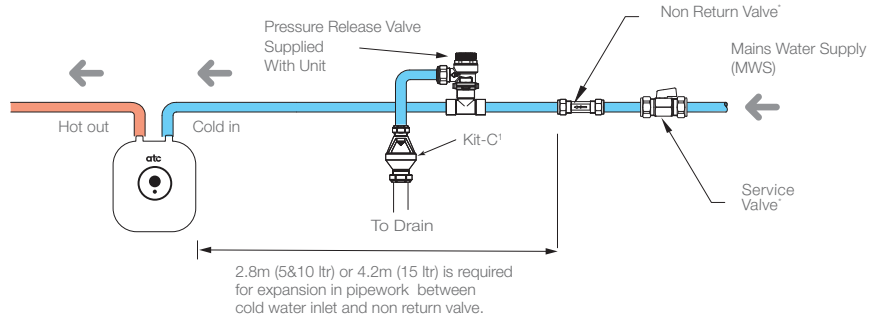


For Inlet water pressure up to 4.1 bar where expansion in the mains is not possible.

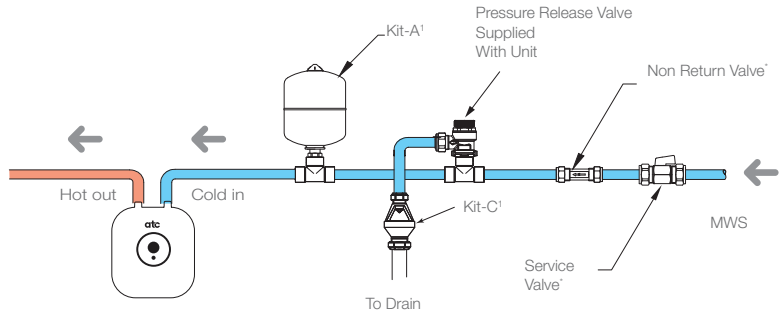

For Inlet water pressure over 4.1 bar

Note: If a pressure reducing valve is used then allowing for expansion in the pipework is not possible. An expansion vessel must be used.

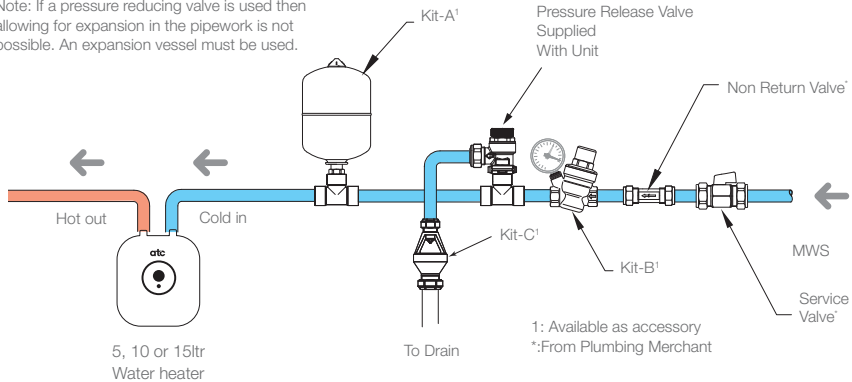



Why Use ATC Unvented Water Heaters?

Energy Efficient

- Fitted with Polyurethane Foam Insulation that reduces heat loss, which Reduces Energy consumption and ensures High Energy Efficiency
- External Thermostat Control with Economy setting for Energy Efficiency
- High performance 2KW square flange heating element which is more Durable and Efficient

Tough and Durable

- Unique Dry Porcelain Enamel Tank lining delivers at least twice the Corrosion Resistance of ordinary glass lining
- Fitted with a Premium Protective Magnesium Anode which equalises aggressive water action and provides Extra Protection against Corrosion

Safety

- Fitted with Thermostat and Limiting Device to protect against overheating