


LED Twin Spot

Supplied c/w Integral Driver

420



- Twin LED emergency floodlighting for industrial applications
- Exceeds performance of 2x20W halogen equivalent
- Robust metal enclosure in an opal colour
- Moulded polycarbonate heads

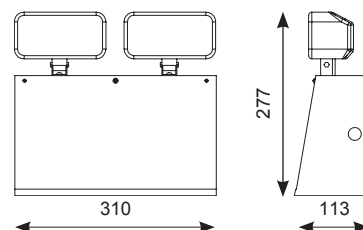

| Code | Lamp | Description |
|-------------------|------|-------------------|
| ATSLED/3NM | LED | 3W Non-Maintained |

Accessory ASBP/7 3.6V 4Ah Ni-Cd Replacement Battery

LED Information

| | |
|----------------|-------------|
| Total (W) | 3W |
| CCT | 6500K |
| Input | 230V |
| Hertz | 50/60Hz |
| Operating Temp | 0C° to 45C° |

