

# Tornado IP65 LED Non-Corrosive

Supplied c/w Integral Driver

364




Stainless Steel Clips as standard



**Tornado**  
ELEMENT PROTECTION LED



- LED Performance allows point-to-point replacement of existing fluorescent luminaires
- Light output exceeds performance of T8 and T5 fluorescent
- Unique luminaire fixing clip design allows option of mounting onto BESA box
- Lockable heavy-duty stainless steel clips supplied as standard for added safety and security
- Self-test emergency as standard
- LED lifespan L70 35,000 hours
- Non-dimmable

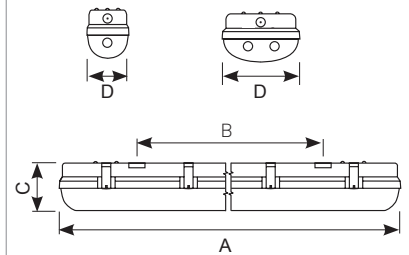

Code	Lamp	Description	A	B	C	D
ATORLED4	LED	20W	1266	860	75	85
ATORLED5	LED	28W	1566	960	75	85
ATORLED6	LED	34W	1866	1030	80	85
ATORLED2X4	LED	40W	1266	860	75	118
ATORLED2X5	LED	58W	1566	960	75	118
ATORLED2X6	LED	70W	1855	1030	80	118

Options	Code	Description
	/M3	Self-Test Emergency
	/MWS	Integral Microwave Sensor
	/MWS/M3	Integral Microwave Sensor Self-Test Emergency

### LED Information

Total (Watts)	20W	40W
	28W	58W
	34W	70W
Lumens Delivered	2088lm	4425lm
	3230lm	6353lm
	3719lm	7537lm
Lm/W	105lm	110lm
	115lm	110lm
	109lm	108lm
CRI	Ra 80	
CCT	4000K	
Input	230V	
Hertz	50Hz	
Operating Temp	-10°C to 40°C	

