

Freska LED Downlight

Supplied c/w Remote Driver

56




AFRLED230/CW



AFRLED170/CW



AFRLED125/CW

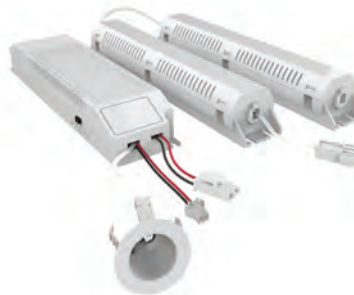

Self-Test Emergency Pack


Ultra-Slim 25mm Profile Depth

Code	Lamp	Description
AFRLED125/CW	LED	10W - Cool White
AFRLED170/CW	LED	13W - Cool White
AFRLED230/CW	LED	19W - Cool White
AFRLED125/WW	LED	10W - Warm White
AFRLED170/WW	LED	13W - Warm White
AFRLED230/WW	LED	19W - Warm White

Option	AFRLED/M3/ST	Self-Test Emergency Pack
--------	--------------	--------------------------

Accessory	ASBP/12	7.2V 3000mAh Ni-cd Replacement Battery
-----------	---------	--

- Economic ultra-slim circular LED downlight
- Ideal for use in areas with shallow ceiling void
- Remote driver with plug and play connection
- Edge lit providing excellent uniform illumination
- 10W comparable performance to 13W PLC
13W comparable performance to 18W PLC
19W comparable performance to 26W PLC
- LED lifespan L70 40,000 hours
- Non-dimmable
- *Optional plug-in self-test emergency pack suitable for all three models*

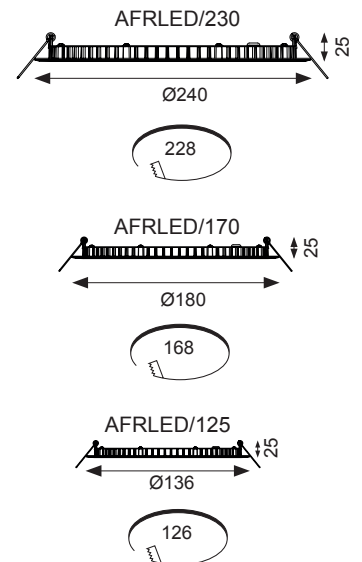

LED Information

Total (Watts)	10W	13W	19W
Lumens Delivered			
10W	618lm	534lm	
13W	916lm	795lm	
19W	1208lm	1152lm	
Lm/W 10W	66lm	59lm	
Lm/W 13W	70lm	61lm	
Lm/W 19W	64lm	61lm	
CRI	Ra 80		
CCT Cool White	4000K		
CCT Warm White	3000K		
Input	230V		
Hertz	50/60Hz		
Operating Temp	-20°C to 40°C		

