



HS38BROWN

**Term Tech Heatshrink 2:1 Ratio 38.2mmØ
Expanded, 19.1mmØ Recovered Brown (Per
Metre)**



The Termination Technology range of thin wall Cross linked Polyolefin Heatshrink is designed for commercial use with common uses including insulation, wire bundling, colour coding and mechanical protection. Available in a range of colours and sizes, all cut to metre as required. Specialist Heatshrink end caps, breakout boots, joints and adhesive lined versions also available from stock.

Technical Data

Colour and Material

| | |
|----------|------------------------|
| Material | Crosslinked Polyolefin |
| Colour | Brown |

Dimensions

| | |
|---------------------|----|
| Led Flat Width (mm) | 64 |
|---------------------|----|

Durability

| | |
|---------------------|---|
| Chemical Resistance | Resistant to common fluids and solvents |
| Fungus Resistance | Tested with no growth occurring |

Electrical Ratings

| | |
|-----------------------------|---|
| Dielectric Strength (kV/mm) | Min 19.7 Tested to ASTM D-2671 |
| Volume Resistivity (Ohm/cm) | Min 10 ¹³ Tested to ASTM D-876 |

Physical Attributes

| | |
|----------------|----|
| Adhesive Lined | No |
|----------------|----|

Product Specification

| | |
|--------------|-----|
| CE Compliant | Yes |
|--------------|-----|





RoHS Compliant

Yes

Temperature and Fire Information

Continuous Operating Temperature (°C)




-55 to +135

Shrink Temperature (°C)

+90 to Start Shrinking

Fire Rating

UL224 VW-1; MIL-I-23053/5 Class 1 & 3

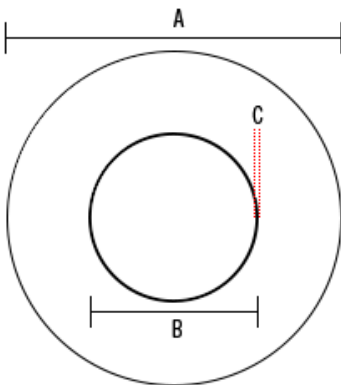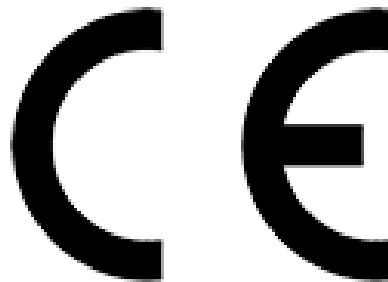

**Termination
Technology Ltd**

Quality and Service

The company with the RIGHT connections at the RIGHT price.

Company Registration Number: 05062297

W: www.termtech.co.uk

T: 01179 354 900

E: sales@termtech.co.uk

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,
Bristol BS5 7UW

