



## HS38BLUE

**Term Tech Heatshrink 2:1 Ratio 38.2mmØ  
Expanded, 19.1mmØ Recovered Blue (Per  
Metre)**



The Termination Technology range of thin wall Cross linked Polyolefin Heatshrink is designed for commercial use with common uses including insulation, wire bundling, colour coding and mechanical protection. Available in a range of colours and sizes, all cut to metre as required. Specialist Heatshrink end caps, breakout boots, joints and adhesive lined versions also available from stock.

## Technical Data

### Colour and Material

Material	Crosslinked Polyolefin
Colour	Blue

### Dimensions

Led Flat Width (mm)	64
---------------------	----

### Durability

Chemical Resistance	Resistant to common fluids and solvents
Fungus Resistance	Tested with no growth occurring

### Electrical Ratings

Dielectric Strength (kV/mm)	Min 19.7 Tested to ASTM D-2671
Volume Resistivity (Ohm/cm)	Min 10 <sup>13</sup> Tested to ASTM D-876

### Physical Attributes

Adhesive Lined	No
----------------	----

### Product Specification

CE Compliant	Yes
--------------	-----



RoHS Compliant

Yes

## Temperature and Fire Information

Continuous Operating Temperature (°C)




-55 to +135

Shrink Temperature (°C)

+90 to Start Shrinking

Fire Rating

UL224 VW-1; MIL-I-23053/5 Class 1 & 3

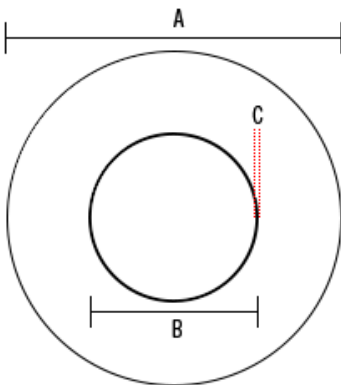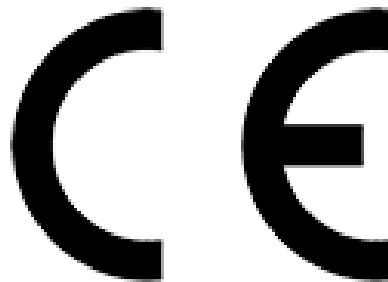

**Termination  
Technology Ltd**

*Quality and Service*

The company with the RIGHT connections at the RIGHT price.

Company Registration Number: 05062297

**W:** [www.termtech.co.uk](http://www.termtech.co.uk)

**T:** 01179 354 900

**E:** [sales@termtech.co.uk](mailto:sales@termtech.co.uk)

Termination Technology Ltd, Unit 4C Crofts End Ind Estate, Crofts End Road,  
Bristol BS5 7UW

