




Integral LED Drivers are designed and built using highly reliable components making sure our range of LED drivers deliver the best performance and solution for both commercial and residential lighting applications.

- ✓ 12V/24V Constant Voltage
- ✓ Available from 20W-250W power output
- ✓ Available IP20, IP65 and IP67 driver
- ✓ Can be used with 12V/24V LED array lighting applications, such as 12V/24V LED strip lighting

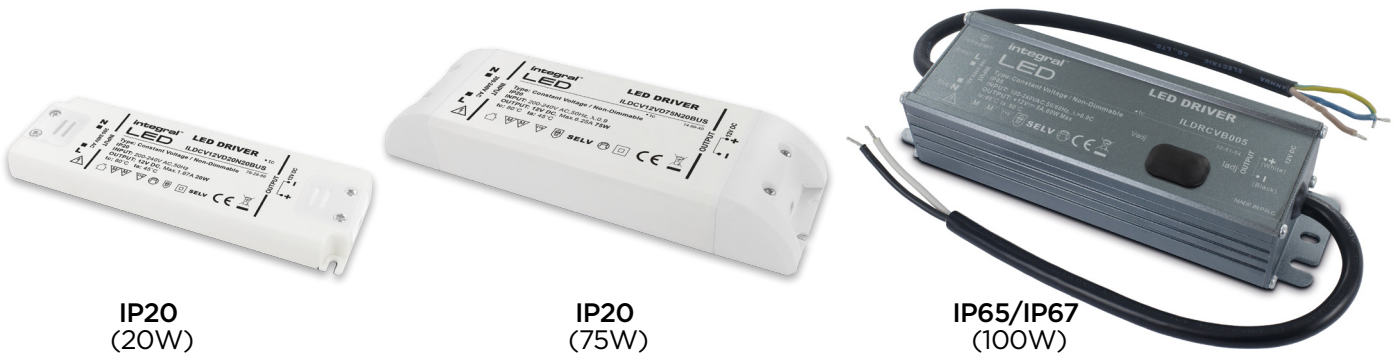

IP20
(20W)

IP20
(75W)

IP65/IP67
(100W)

For guidance on how to choose the wattage of your driver please see page 7

Product Code	Input Voltage	Output Power	Output Voltage	Output Current	IP Rating	Dimension mm
IP20 Driver - 12V and 24V Constant Voltage						3 year warranty
Non-Dimmable						
ILDRCVA040	200 - 240V AC, 50Hz	20W	12VDC	Max. 1.67A	IP20	154 x 54 x 14 mm
ILDRCVA042	200 - 240V AC, 50/60Hz	20W	12VDC	Max. 1.67A	IP20	103 x 35 x 16 mm
ILDRCVA041	200 - 240V AC, 50Hz	40W	12VDC	Max. 3.33A	IP20	160 x 58 x 18 mm
66-85-42	200 - 240V AC, 50Hz	50W	12VDC	Max. 4.17A	IP20	185 x 64 x 22 mm
ILDRCVA043	200 - 240V AC, 50/60Hz	50W	12VDC	Max. 4.2A	IP20	160 x 58 x 18 mm
ILDRCVA044	200 - 240V AC, 50Hz	75W	12VDC	Max. 6.25A	IP20	201 x 63 x 30 mm
ILDRCVA045	220 - 240V AC, 50/60Hz	100W	12VDC	Max. 8.33A	IP20	180 x 65.5 x 31 mm
ILDRCVA046	200 - 240V AC, 50/60Hz	20W	24VDC	Max. 0.83A	IP20	103 x 35 x 16 mm
ECP50-24VF-1	200 - 240V AC, 50Hz	50W	24VDC	Max. 2.08A	IP20	185 x 64 x 22 mm
ILDRCVA047	200 - 240V AC, 50Hz	75W	24VDC	Max. 3.12A	IP20	175 x 47 x 33 mm
ILDRCVA048	220 - 240V AC, 50/60Hz	100W	24VDC	Max. 4.17A	IP20	180 x 65.5 x 31 mm
Dimmable (Triac)						
ELED-25-12T	25W Triac dimmable driver Output 12V DC Input 180 - 240VAC 25W Min. load 2.5W. Suitable for Leading Edge dimmer					
ELED-50-12T	50W Triac dimmable driver Output 12V DC Input 200 - 240VAC Min. load 5W. Suitable for Leading Edge dimmer					
ELED-50-24T	50W Triac dimmable driver Output 24V DC Input 200 - 240VAC Min. load 5W. Suitable for Leading Edge dimmer					

Product Code	Input Voltage	Output Power	Output Voltage	Output Current	IP Rating	Dimension mm
IP65/IP67 Driver - 12V and 24V Constant Voltage						3 year warranty
Non-Dimmable						
ILDRCVB005	100 - 240V AC, 50/60Hz	60W	12VDC	5A	IP65	172 x 52.9 x 36.5 mm
ILDRCVB006	100 - 240V AC, 50/60Hz	97W	12VDC	8.1A	IP65	190 x 62 x 36.5 mm
ILDRCVB007	100 - 240V AC, 50/60Hz	150W	12VDC	12.5A	IP65	221 x 62 x 36.5 mm
ILDRCVB008	100 - 240V AC, 50/60Hz	216W	12VDC	18A	IP65	225 x 74 x 38 mm
ILDRCVC049	200 - 240V AC, 50/60Hz	100W	12VDC	8.33A	IP67	212 x 46 x 38.3mm
ILDRCVC050	200 - 240V AC, 50/60Hz	150W	12VDC	12.5A	IP67	190 x 62 x 36.5 mm
ILDRCVC051	200 - 240V AC, 50/60Hz	240W	12VDC	20A	IP67	221 x 62 x 36.5 mm
ILDRCVB009	100 - 240V AC, 50/60Hz	99W	24VDC	4.1A	IP65	190 x 62 x 36.5 mm
ILDRCVB011	100 - 240V AC, 50/60Hz	250W	24VDC	10.4A	IP65	225 x 74 x 38 mm
ILDRCVC052	200 - 240V AC, 50/60Hz	100W	24VDC	4.17A	IP67	212 x 46 x 38.3mm
ILDRCVC053	200 - 240V AC, 50/60Hz	150W	24VDC	6.25A	IP67	190 x 62 x 36.5 mm
ILDRCVC054	200 - 240V AC, 50/60Hz	250W	24VDC	10.4A	IP67	221 x 62 x 36.5 mm
HLG-320H-24A	100 - 240V AC, 50/60Hz	320W	24VDC	13.34A	IP65	256 x 90 x 43 mm
Dimmable (Triac)						
ELED-100-12T	100W Triac dimmable driver Output 12V DC Input 180 - 240VAC Rated power 100W Min. load 10W Suitable for Leading Edge dimmer					
ELED-100-24T	100W Triac dimmable driver Output 24V DC Input 180 - 240VAC Rated power 100W Min. load 10W Suitable for Leading Edge dimmer					
ELED-200-12T	200W Triac dimmable driver Output 12V DC Input 180 - 240VAC Rated power 200W Min. load 20W Suitable for Leading Edge dimmer					
ELED-200-24T	200W Triac dimmable driver Output 24V DC Input 180 - 240VAC Rated power 200W Min. load 20W Suitable for Leading Edge dimmer					