

**LIGHTSPAN T8 BATTEN 5FT SINGLE EMERGENCY 3HR 3900LM 30W  
130LM/W 4000K 120 BEAM 1470MM LINKABLE NON-DIMM INTEGRAL**

ILBTC114



Integral Lightspan Battens provide an efficient alternative to T8 fluorescent tube fittings. With their high lumen output, Lightspan battens are ideal for indoor commercial spaces that need bright task lighting and at up to 130lm/W they offer big energy savings compared to equivalent fluorescent fittings.

**Details**

<b>Quick Order Code:</b>	985014
<b>Barcode:</b>	5055788251279
<b>Category:</b>	Luminaires
<b>Range Name:</b>	Lightspan
<b>Type:</b>	Single
<b>Product Type:</b>	Battens
<b>Product Body Finish:</b>	Matt white
<b>Market Segment:</b>	Indoor commercial, Industrial, residential
<b>Finish:</b>	Matt White
<b>Features:</b>	Emergency Function
<b>Warranty (Years):</b>	3
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	1470
<b>Product Depth (mm):</b>	70
<b>Product Width (mm):</b>	60
<b>Product Weight (g):</b>	2300
<b>Optic:</b>	Polycarbonate diffuser
<b>Material:</b>	Polycarbonate, Aluminium
<b>Construction:</b>	Injection moulding
<b>Bulb or Luminaire Shape:</b>	Linear
<b>Luminaire Fixing:</b>	Wall / Ceiling / Pendant / Conduit mounted
<b>Mounting Type:</b>	Rear & Side Cable Entry
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power Consumption (w):</b>	30
-------------------------------	----


<b>Power Factor:</b>	0.9
<b>Wattage equivalent (W):</b>	58
<b>Input Voltage (V):</b>	220-240
<b>Dimming:</b>	Non-Dimmable
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>Emergency Battery Life (years):</b>	2
<b>Emergency Type:</b>	Non-Maintained
<b>EN:</b>	EN-60598
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	3600
<b>Luminous efficacy (lm/W):</b>	130
<b>Correlated Colour Temperature (CCT) (K):</b>	4000
<b>Colour Temperature Name:</b>	Cool White
<b>Beam Angle:</b>	120
<b>Colour Rendering Index (CRI):</b>	80
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Size (mm):</b>	2835
<b>LED Type:</b>	Surface mounted device (SMD)
<b>Lifetime (hours):</b>	30000
<b>Lumens in Emergency mode (lm):</b>	260
<b>Useful Lumens (lm):</b>	3600

## Environment

<b>EN:</b>	EN-60598
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>EU Luminaire:</b>	L
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IK Rating (Impact Protection):</b>	IK06
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	50

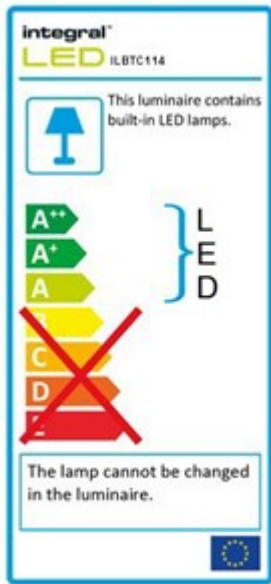

## Packaging

<b>Package Weight (g):</b>	2420
<b>Package Length (mm):</b>	1475
<b>Package Width (mm):</b>	68
<b>Package Depth (mm):</b>	79

[Portal.integral-led.com](http://Portal.integral-led.com)