

**MULTI-FIT DOWNLIGHT 65-205MM CUTOUT 1530LM 18W 4000K DIMMABLE  
85LM/W WHITE INTEGRAL**

ILD205-65G004



The downlight is supplied with configurable brackets and clips allowing for installation in a cut-out from 65-205mm as well as having a surface mount installation option. Visible flicker is eliminated with the integrated driver and a frosted diffuser provides uniform light.

**Details**

|                             |                   |
|-----------------------------|-------------------|
| <b>Quick Order Code:</b>    | 353487            |
| <b>Barcode:</b>             | 5055788241140     |
| <b>Category:</b>            | Downlights        |
| <b>Range Name:</b>          | Multi-Fit         |
| <b>Product Type:</b>        | LED Downlights    |
| <b>Product Body Finish:</b> | Matt white        |
| <b>Market Segment:</b>      | Commercial indoor |
| <b>Warranty (Years):</b>    | 3                 |
| <b>CE RoHS:</b>             | Yes               |

**Physical Data**

|                                 |  |
|---------------------------------|--|
| <b>Product Weight (g):</b>      | 405  |
| <b>Optic:</b>                   | Opal diffuser                              |
| <b>Material:</b>                | Aluminium, PS                              |
| <b>Overall diameter (mm):</b>   | 230  |
| <b>Construction:</b>            | Die cast Aluminium body, PS sheet diffuser |
| <b>Cut Out Diameter (mm):</b>   | 65-205                                     |
| <b>Luminaire Fixing:</b>        | Recess or surface mounted                  |
| <b>Placement / Application:</b> | Indoor, General Lighting                   |

**Electrical Data**

|                                |            |
|--------------------------------|------------|
| <b>Power (W):</b>              | 18         |
| <b>Power Consumption (w):</b>  | 18         |
| <b>Power Factor:</b>           | 0.5        |
| <b>Wattage equivalent (W):</b> | 26         |
| <b>Dimming:</b>                | TRIAC      |
| <b>Driver Included:</b>        | Integrated |
| <b>Electric Current:</b>       | AC         |


EN: EN-60598  
LVD Certified: Yes

## Light Data

Luminous Flux in Lumens (lm): 1530  
Correlated Colour Temperature (CCT) (K): 4000  
Colour Temperature: 4000K - Cool White  
Colour Temperature Name: Cool White  
Beam Angle: 120  
Colour Rendering Index (CRI): 80  
LED Type: Surface mounted device (SMD)  
Lifetime (hours): 30000  
Switching Cycles: 15000

## Environment

EN: EN-60598  
LVD Certified: Yes  
CE RoHS: Yes  
EU Luminaire: L  
Hg 0% (Mercury Free): Yes  
IP Rating (Ingress Protection): IP20  
Lowest Operating Temperature (°C): -20  
Maximum Operating Temperature (°C): 40

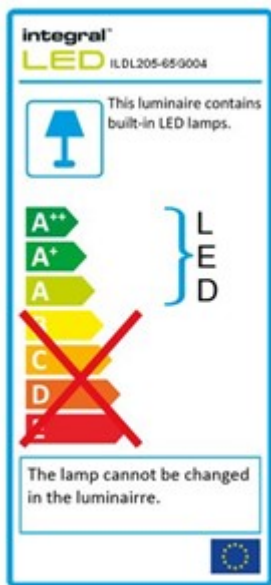

## Packaging

Package Weight (g): 500  
Package Length (mm): 275  
Package Width (mm): 239  
Package Depth (mm): 36

[Portal.integral-led.com](http://Portal.integral-led.com)