

**WARMTONE CANDLE BULB B22 470LM 6W 1800-2700K DIMMABLE 220
BEAM FROSTED INTEGRAL**

ILCANDB22DC058



The dimmer the light, the warmer the colour - Integral WarmTone LED Lamps are ideal for bringing a cosy atmosphere to your home or hospitality environments. By using advanced LED dimming technology, the WarmTone range closely resembles the dimming performance of halogen or incandescent lamps, which naturally get warmer in tone as they dim to lower levels of luminosity. The Warmtone range combines the aesthetic benefits of traditional lighting technologies with the energy efficiency and long lifetime of LED.

Details

Quick Order Code:	979465
Barcode:	5055788240310
Category:	Lamps
Range Name:	WarmTone
Product Type:	Candle
Market Segment:	Commercial indoor, Residential indoor
Features:	Dim-to-Warm
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	105
Product Width (mm):	35
Product Weight (g):	58
Bulb Base:	B22
Construction:	Plastic
Globe Finish:	Frosted
Globe Type:	Candle
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	6
Power Consumption (w):	6
Power Factor:	0.5
Wattage equivalent (W):	40


Amperage (mA):	27
Dimming:	Dimmable
Electric Current:	AC
True Wattage Eq (W):	40
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	470
Luminous efficacy (lm/W):	78
Correlated Colour Temperature (CCT) (K):	1800-2700
Colour Temperature:	CCT Tunable
Colour Temperature Name:	Ultra Warm to Warm White
Beam Angle:	220
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	7500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Energy Rating:	A+
New Energy Rating:	F
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

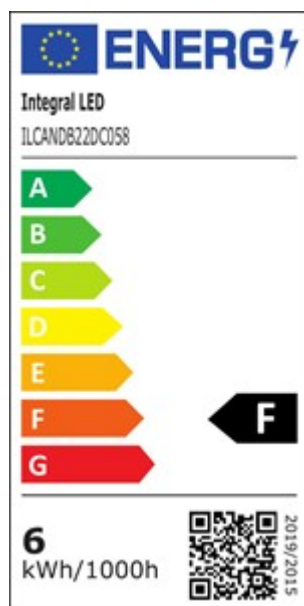

Packaging

Package Weight (g):	76	Portal.integral-led.com
Package Length (mm):	110	

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Width (mm): 50
Package Depth (mm): 50