

**LOW-PROFILE FIRE RATED DOWNLIGHT 70-75MM CUTOUT IP65 850LM 10W
4000K 60 BEAM DIMMABLE 85LM/W SATIN NICKEL INTEGRAL**

ILDLEFR70B017



These low-profile lamps are fire rated to 30, 60 and 90 minutes, Air Tightness compliant with Part C and Part L and Resistance to Sound compliant with Part E. Warm White and Cool White colour temperature options and dimmable or non-dimmable options are available. Importantly, these lamps are IP65 rated and designed to offer the safety and quality of other Fire Rated Downlights but with a lower price-tag. The stylish satin-nickel finish looks great in any ceiling.

Details

Quick Order Code:	147105
Barcode:	5055788229278
Category:	Downlights
Range Name:	Low-profile
Product Type:	Fire Rated
Product Body Finish:	Satin Nickel
Market Segment:	Commercial indoor, Residential indoor
Finish:	Satin Nickel
Fixed/Tiltable:	Fixed
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	58
Product Width (mm):	85
Product Weight (g):	380
Optic:	Clear Refractor
Material:	Aluminium alloy, Acrylic, Iron
Overall diameter (mm):	85
Construction:	Extruded Aluminium alloy heat-sink, Iron body, Steel springs and mounting plate, Acrylic diffuser
Cut Out Diameter (mm):	70-75
Luminaire Fixing:	Recess mounted
Placement / Application:	Indoor, General Lighting
Spot Type:	COB

Electrical Data


Power (W):	10
Power Consumption (w):	10
Power Factor:	0.9
Wattage equivalent (W):	62
Amperage (mA):	240
Dimming:	Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	850
Luminous efficacy (lm/W):	85
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature:	4000K - Cool White
Colour Temperature Name:	Cool White
Beam Angle:	60
Colour Rendering Index (CRI):	80
Compatible Dimmers:	Varilight JQP401W
Fire Rating (mins):	30, 60, 90
Instant on (Less than 1 second):	Yes
LED Type:	Chip-on-board (COB)
Lifetime (hours):	25000
Switching Cycles:	12500

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP65
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	45

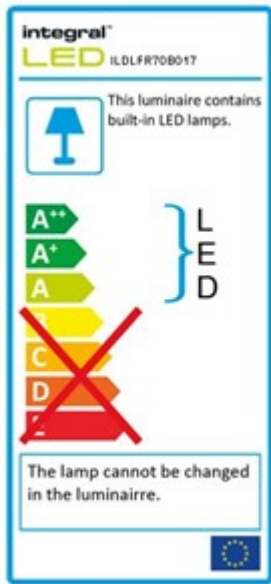

Packaging

Package Weight (g):	450
Package Length (mm):	110
Package Width (mm):	108
Package Depth (mm):	82
Qty per euro pallet:	840

Portal.integral-led.com