

**OMNI FILAMENT CANDLE BULB E27 470LM 4.5W 2700K DIMMABLE 300 BEAM CLEAR FULL GLASS INTEGRAL**

ILCANDE27DC042



Integral Filament Omni Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in chandeliers and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

**Details**

<b>Quick Order Code:</b>	712482
<b>Barcode:</b>	5055788221890
<b>Category:</b>	Lamps
<b>Range Name:</b>	Omni
<b>Product Type:</b>	Candle
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	92
<b>Product Width (mm):</b>	35
<b>Product Weight (g):</b>	19
<b>Material:</b>	Glass
<b>Base Term:</b>	Edison screw
<b>Bulb Base:</b>	E27
<b>Construction:</b>	Glass shell, filament strip
<b>Globe Finish:</b>	Clear
<b>Globe Type:</b>	Candle
<b>Bulb Fixing:</b>	Pendant, Wall, lamp stand, table lamp
<b>Bulb or Luminaire Shape:</b>	Oval
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	4.5
<b>Power Consumption (w):</b>	4.5
<b>Power Factor:</b>	0.7
<b>Wattage equivalent (W):</b>	40


<b>Amperage (mA):</b>	27
<b>Dimming:</b>	Dimmable
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	470
<b>Luminous efficacy (lm/W):</b>	104
<b>Correlated Colour Temperature (CCT) (K):</b>	2700
<b>Colour Temperature:</b>	2700K - Warm
<b>Colour Temperature Name:</b>	Warm
<b>Beam Angle:</b>	300, 330
<b>Colour Rendering Index (CRI):</b>	80
<b>Compatible Dimmers:</b>	Varilight JQP401W
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Type:</b>	Filament chip
<b>Lifetime (hours):</b>	15000
<b>Switching Cycles:</b>	7500

## Environment

<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>Energy Rating:</b>	A++
<b>New Energy Rating:</b>	E
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	45

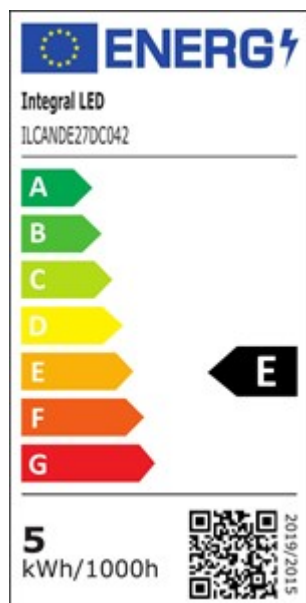

## Packaging

**Package Weight (g):**

69

[Portal.integral-led.com](http://Portal.integral-led.com)

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

<b>Package Length (mm):</b>	108
<b>Package Width (mm):</b>	42
<b>Package Depth (mm):</b>	42
<b>Qty per euro pallet:</b>	2400