

**CLASSIC FILAMENT GLS BULB B22 470LM 4.5W 2700K NON-DIMM 300
BEAM FROSTED INTEGRAL**

ILGLSB22NC092



The Classic Full Glass Frosted lamp utilises Filament LED technology to create a decorative look and wide beam angle that looks fantastic in fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

Details

Quick Order Code:	634209
Barcode:	5055788251859
Category:	Lamps
Range Name:	Classic
Product Type:	GLS
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	103
Product Width (mm):	60
Product Weight (g):	30
Material:	Aluminium, Glass
Base Term:	Bayonet cap
Bulb Base:	B22
Construction:	Glass shell, Filament strip, Aluminium base
Globe Finish:	Frosted
Globe Type:	GLS
Bulb Fixing:	Pendant, Wall, lamp stand, table lamp
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	4.5
Power Consumption (w):	4.5
Power Factor:	0.48
Wattage equivalent (W):	40


Amperage (mA):	40
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	40
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	470
Luminous efficacy (lm/W):	104
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700K - Warm
Colour Temperature Name:	Warm
Beam Angle:	300
Colour Rendering Index (CRI):	80
Compatible Dimmers:	Varilight
Instant on (Less than 1 second):	Yes
LED Manufacturer:	Seoul
LED Type:	Filament chip
Lifetime (hours):	15000
Switching Cycles:	7500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Energy Rating:	A++
New Energy Rating:	E
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

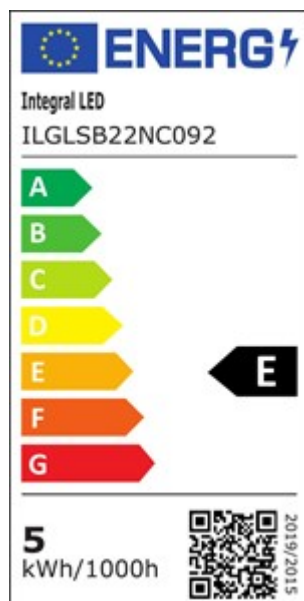

Portal.integral-led.com

Packaging

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Weight (g):	60
Package Length (mm):	120
Package Width (mm):	65
Package Depth (mm):	65