

**LIGHTSPAN T8 BATTEN 4FT SINGLE STANDARD 2800LM 22W 130LM/W
4000K 120 BEAM 1170MM LINKABLE NON-DIMM INTEGRAL**

ILBTC111



Integral Lightspan Battens provide an efficient alternative to T8 fluorescent tube fittings. With their high lumen output, Lightspan battens are ideal for indoor commercial spaces that need bright task lighting and at up to 130lm/W they offer big energy savings compared to equivalent fluorescent fittings.

Details

Quick Order Code:	492843
Barcode:	5055788251248
Category:	Luminaires
Range Name:	Lightspan
Type:	Single
Product Type:	Battens
Product Body Finish:	Matt white
Market Segment:	Indoor commercial, Industrial, residential
Finish:	Matt White
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	1170
Product Depth (mm):	70
Product Width (mm):	60
Product Weight (g):	1700
Optic:	Polycarbonate diffuser
Material:	Polycarbonate, Aluminium
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Wall / Ceiling / Pendant / Conduit mounted
Mounting Type:	Rear & Side Cable Entry
Placement / Application:	Indoor, General Lighting

Electrical Data

Power Consumption (w):	22
Power Factor:	0.9


Wattage equivalent (W):	36
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	2600
Luminous efficacy (lm/W):	130
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Size (mm):	2835
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	30000
Useful Lumens (lm):	2600

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK06
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	50

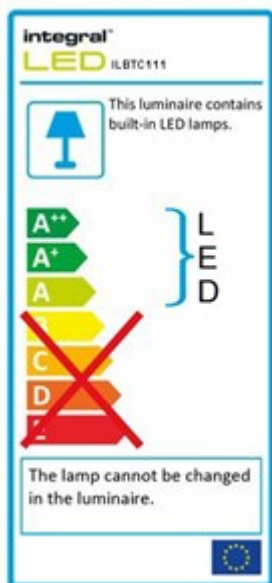

Packaging

Package Weight (g):	1800
----------------------------	------

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	1175
Package Width (mm):	68
Package Depth (mm):	79