

GLS BULB B22 806LM 8.8W 5000K DIMMABLE 220 BEAM FROSTED INTEGRAL

ILGLSB22DF102



This 8.8W retro-fit Integral LED Classic Globe (GLS) (large bayonet base) delivers a dimmable, daylight and brightness, similar to a 60W filament bulb. It features high output, multi Everlight LEDs, an anti-glare refractor, all finished in an aluminium and plastic, thermally efficient body. Ideal for living rooms, hallways and kitchens.

Details

Quick Order Code:	216851
Barcode:	5055788253709
Category:	Lamps
Range Name:	Everyday
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	103
Product Width (mm):	60
Product Weight (g):	100
Material:	Plastic, Aluminium, Nickel plated brass
Base Term:	Bayonet cap
Bulb Base:	B22
Construction:	Plastic and Aluminium heat-sink, Polycarbonate diffuser
Globe Finish:	Frosted
Globe Type:	Classic Globe (GLS)
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	8.8
Power Consumption (w):	8.8
Power Factor:	0.7
Wattage equivalent (W):	60
Amperage (mA):	56


Dimming:	Dimmable with compatible dimmers
Driver IC Manufacturer:	Power Integrations (PI)
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	60
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	806
Luminous efficacy (lm/W):	92
Correlated Colour Temperature (CCT) (K):	5000
Colour Temperature:	5000K - Daylight
Colour Temperature Name:	Daylight
Beam Angle:	220
Colour Rendering Index (CRI):	80
Compatible Dimmers:	Varilight
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	25000
Switching Cycles:	12500
Useful Lumens (lm):	400

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Energy Rating:	A+
New Energy Rating:	F
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

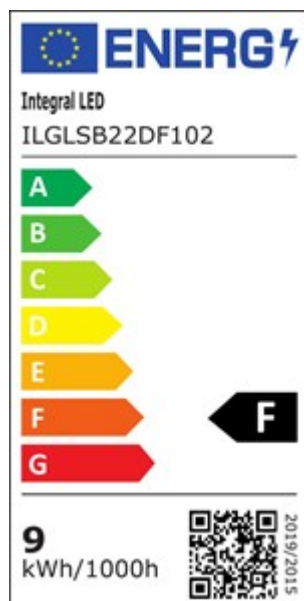

Portal.integral-led.com

Packaging

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Weight (g):	40
Package Length (mm):	65
Package Width (mm):	65
Package Depth (mm):	120