

**OUTDOOR DECORATIVE WALL LIGHT CURVE PIR IP54 360LM 8W 3000K  
DOWN LIGHT DARK GREY INTEGRAL**

ILDEA009



Discover Integral's new outdoor range. Light up the exterior of your home with these compact, stylish and contemporary LED luminaires. Weatherproof and hard-wearing, this range is designed to last against the elements while bringing a designer look to your surroundings. Sleek and sophisticated, the Curve wall light is the ideal accessory to light up your outdoor space. This product includes a PIR sensor to automatically switch on as people walk past, ideal for safety and security.

**Details**

<b>Quick Order Code:</b>	317839
<b>Barcode:</b>	5055788232629
<b>Category:</b>	Luminaires
<b>Range Name:</b>	Wall Light
<b>Product Type:</b>	Outdoor
<b>Market Segment:</b>	Residential Outdoor
<b>Features:</b>	PIR Sensor
<b>Warranty (Years):</b>	3
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	275
<b>Product Depth (mm):</b>	112
<b>Product Width (mm):</b>	117
<b>Product Weight (g):</b>	700
<b>Optic:</b>	Opal Polycarbonate diffuser
<b>Material:</b>	Die cast aluminium body with powder coated finish
<b>Luminaire Fixing:</b>	Wall Mounted
<b>Placement / Application:</b>	Outdoor, General Lighting

**Electrical Data**

<b>Power Consumption (w):</b>	8
<b>Power Factor:</b>	0.8
<b>Amperage (mA):</b>	350
<b>Dimming:</b>	Non-Dimmable
<b>Driver Included:</b>	Yes


<b>Electric Current:</b>	AC
<b>EN:</b>	EN-60598
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	360
<b>Luminous efficacy (lm/W):</b>	45
<b>Correlated Colour Temperature (CCT) (K):</b>	3000
<b>Colour Temperature Name:</b>	Warm White
<b>Colour Rendering Index (CRI):</b>	80
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Type:</b>	Surface mounted device (SMD)
<b>Lifetime (hours):</b>	25000
<b>Switching Cycles:</b>	12500

## Environment

<b>EN:</b>	EN-60598
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>EU Luminaire:</b>	L
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP54
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	40

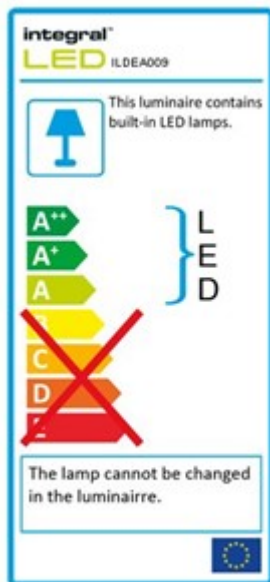

## Packaging

<b>Package Weight (g):</b>	810
<b>Package Length (mm):</b>	285
<b>Package Width (mm):</b>	128
<b>Package Depth (mm):</b>	122

[Portal.integral-led.com](http://Portal.integral-led.com)