

OMNI FILAMENT GOLF BALL BULB B15 470LM 3.4W 2700K DIMMABLE 300 BEAM CLEAR INTEGRAL

ILGOLFB15DC063



Integral Filament Omni Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in chandeliers and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

Details

| | |
|--------------------------|---------------------------------------|
| Quick Order Code: | 690011 |
| Barcode: | 5055788260264 |
| Category: | Lamps |
| Range Name: | Omni |
| Market Segment: | Commercial indoor, Residential indoor |
| Warranty (Years): | 2 |
| CE RoHS: | Yes |

Physical Data

| | |
|---------------------------------|---|
| Product Length (mm): | 78 |
| Product Width (mm): | 45 |
| Product Weight (g): | 41 |
| Material: | Aluminium, Glass |
| Base Term: | Small Bayonet cap |
| Bulb Base: | B15 |
| Construction: | Glass shell, Filament strip, Aluminium base |
| Globe Finish: | Clear |
| Globe Type: | Golf Ball |
| Bulb or Luminaire Shape: | Round |
| Placement / Application: | Indoor, General Lighting |
| Spot Type: | Filament |

Electrical Data

| | |
|--------------------------------|----------------------------------|
| Power Consumption (w): | 3.4 |
| Power Factor: | 0.4 |
| Wattage equivalent (W): | 40 |
| Amperage (mA): | 25 |
| Dimming: | Dimmable with compatible dimmers |


| | |
|-----------------------------|----------|
| Driver Included: | Yes |
| Electric Current: | AC |
| True Wattage Eq (W): | 40 |
| EN: | EN-62560 |
| LVD Certified: | Yes |

Light Data

| | |
|---|---------------|
| Luminous Flux in Lumens (lm): | 470 |
| Luminous efficacy (lm/W): | 138 |
| Correlated Colour Temperature (CCT) (K): | 2700 |
| Colour Temperature: | 2700K - Warm |
| Colour Temperature Name: | Warm |
| Beam Angle: | 320 |
| Colour Rendering Index (CRI): | 80 |
| Colour Type: | Single |
| Instant on (Less than 1 second): | Yes |
| LED Type: | Filament chip |
| Lifetime (hours): | 15000 |
| Switching Cycles: | 7500 |

Environment

| | |
|--|----------|
| EN: | EN-62560 |
| LVD Certified: | Yes |
| CE RoHS: | Yes |
| Energy Rating: | A+ |
| New Energy Rating: | D |
| Hg 0% (Mercury Free): | Yes |
| IP Rating (Ingress Protection): | IP20 |
| Lowest Operating Temperature (°C): | -20 |
| Maximum Operating Temperature (°C): | 40 |

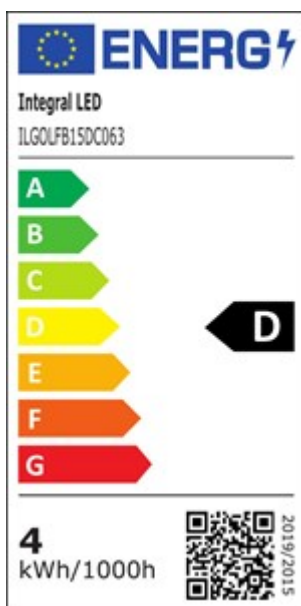

Packaging

| | | |
|-----------------------------|----|--|
| Package Weight (g): | 50 | Portal.integral-led.com |
| Package Length (mm): | 48 | |

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Width (mm): 48
Package Depth (mm): 95