



Tornado 110V LED

Supplied c/w Integral Driver

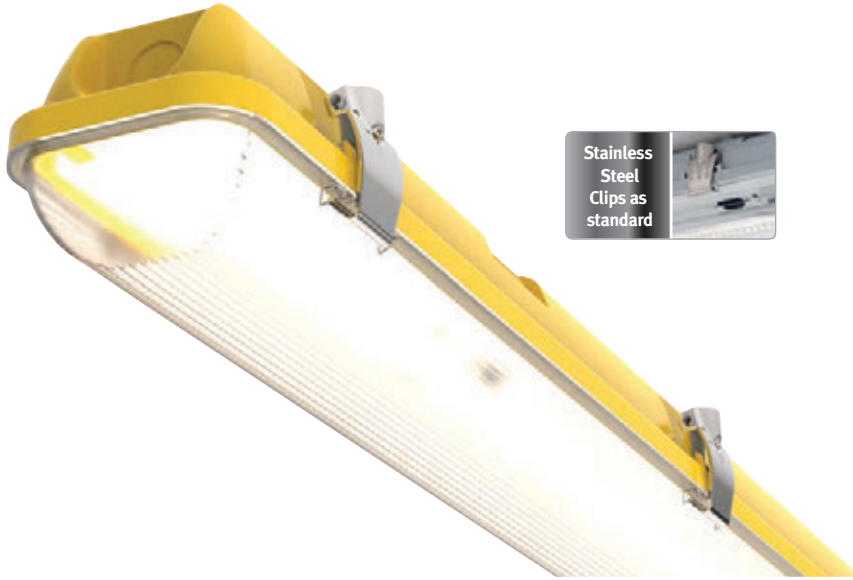

Stainless Steel Clips as standard

- LED Performance allows point-to-point replacement of existing fluorescent luminaires
- Suitable for all types of site lighting
- Light output exceeds performance of T8 and T5 fluorescent
- Unique luminaire fixing clip design allows option of mounting onto BESA box
- IK08 Rating
- Lockable heavy-duty stainless steel clips supplied as standard for added safety and security
- Self-test emergency as standard
- LED lifespan L70 35,000 hours
- Non-dimmable

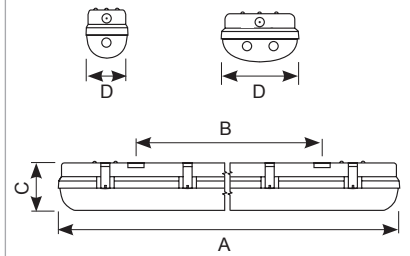

Code	Lamp	Description	A	B	C	D
ATORLED4/110V	LED	20W	1266	860	75	85
ATORLED5/110V	LED	28W	1566	960	75	85
ATORLED2X4/110V	LED	40W	1266	860	75	118
ATORLED2X5/110V	LED	58W	1566	960	75	118

Options	/M3	Self-Test Emergency
---------	-----	---------------------

LED Information

Total (Watts)	20W 40W	28W 58W
Lumens Delivered	2088lm 4225lm	3230lm 6353lm
Lm/W	104lm 110lm	115lm 110lm
CRI		Ra 80
CCT		4000K
Input		100/240V
Hertz		50Hz
Operating Temp		-10°C to 40°C