


Colossus HO LED Floodlight


Supplied c/w Remote LED Driver in a IP65 Enclosure



- Die-cast aluminium luminaire with symmetrical light distribution
- High output, high efficiency floodlight
- Suitable for large external sports or industrial applications
- 500W exceeds the performance of 1000W HQI
- 1000W comparable to performance of 2000W HQI
- Supplied with remote mounted control gear in an IP65 enclosure
- LED Lifespan L70 50,000 hours
- Non-dimmable



ACOLED500

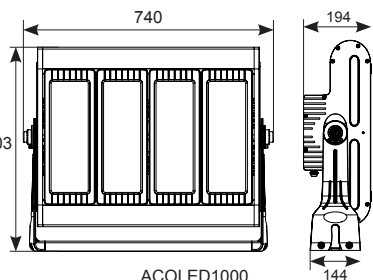

ACOLED1000



ACOLED500



ACOLED1000



Remote IP65 Enclosure

LED Information

Total (Watts)	500W
	1000W
Lumens Delivered	
500W	66489lm
1000W	132827lm
Beam Angle	60°
Lm/W 500W	133lm
Lm/W 1000W	133lm
CRI	Ra 70
CCT	5000K
Input	100/240V
Hertz	50/60Hz
Operating Temp	-40°C to 50°C

Code Lamp Description

ACOLED500	LED	500W - Daylight
ACOLED1000	LED	1000W - Daylight

