

# R6cs™

## Colour Switchable Fixed Fire Rated Downlight



- Fitted with FastRFix™ connector for ease of installation and circuit testing
- Loop in loop out push-fit wiring terminals
- Colour switchable between 3000K, 4000K and 5700K
- Low profile design for shallow ceiling voids (50mm)
- Supplied with white IP65 polycarbonate bezel
- Insulation coverable
- Patented fire rated downlight without intumescent
- Fire, acoustic and air leakage rated
- Tested in 30, 60 and 90 minute solid timber joist, plus 30 minute i-joists and metal web joist

5 Year Warranty

L70 40,000hrs

Triac dimmable as standard

Emergency option

IP65 Polycarbonate  
Polished Chrome, Satin  
Nickel and Matt Black  
bezel options




3 hour Emergency pack AU-FRLM10EMB available.



### FASTRFIX™




Push-Fit Wiring  
Terminals



Colour Switchable

4000K



Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
<b>R6CS™ Colour Switchable Triac Dimmable Fixed (IP65 when used with IP65 Bezel)</b>						
<b>AU-R6CSFF</b>	6W	3000-5700K	620lm	103	60°	70mm


#### Bezel Options

- AU-R6BZ\*** R6™ Fixed IP65 Polycarbonate Bezel
- AU-AP600†** mPro™ & R Series™ Fixed Fire Rated Adaptor Plate 85-145mm

\*Add suffix **MB, PC** or **SN** for Matt Black, Polished Chrome or Satin Nickel finishes.  
†Add suffix **W, MW, PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes.  
**3 hour Emergency pack AU-FRLM10EMB available.**  
Lumen value based on 4000K



Recess Depth 50mm

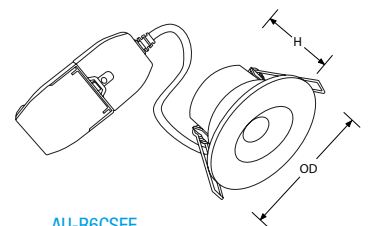

**AU-R6CSFF**  
(H) 50mm Height  
(OD) 88mm Overall (Ø)