

5 Year Warranty

L80 50,000hrs

1-10V & DALI dimmable options

Emergency option

White finish

BackLite™

Backlit Panels

No light guide, removing the risk of yellowing

PMMA lenses for uniformity of light

SDCM <5 providing consistent light colour quality

Flicker free driver

Power Factor > 0.9

UGR19 achievable (AU-BLPE6060 & AU-BLPE1230 only)

UGR22 (AU-BLPE1260 only)


Suitable for installation in 15 and 24mm T-bar ceilings




100lm/W

**COMING
SPRING
2023**



AU-BLPE6060



AU-BLPE1260



AU-BLPE1230

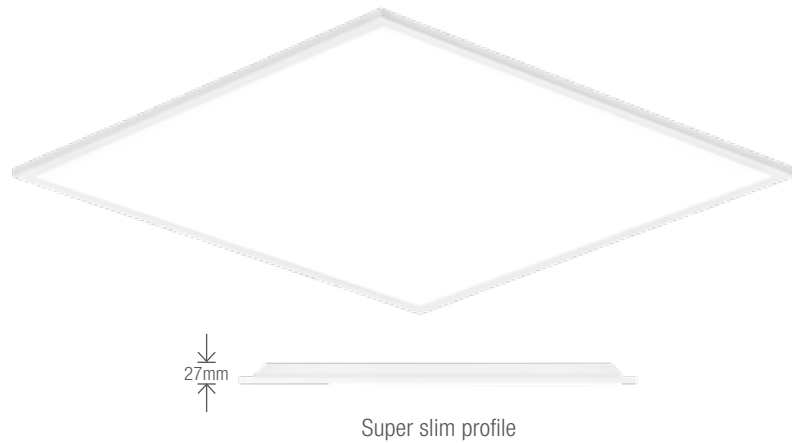

Cat. No.	Type	Watts	Colour	Lumens	lm/W	Beam
600 x 600mm						
AU-BLPE6060*[†]/40[†]	Non-Dim	36W	4000K	3600lm	100	110°
AU-BLPE6060*[†]/65[†]	Non-Dim	36W	6500K	3600lm	100	110°
1200 x 600mm						
AU-BLPE1260*[†]/40[†]	Non-Dim	50W	4000K	5000lm	100	110°
AU-BLPE1260*[†]/65[†]	Non-Dim	50W	6500K	5000lm	100	110°
1200 x 300mm						
AU-BLPE1230*[†]/40[†]	Non-Dim	36W	4000K	3600lm	100	110°
AU-BLPE1230*[†]/65[†]	Non-Dim	36W	6500K	3600lm	100	110°

Accessories

AU-EM1EX

3 Hour Maintained Emergency Pack


AU-EM1EXST

3 Hour Maintained Self Test Emergency Pack

*Add suffix **DA** for DALI or **V** for 1-10V dimmable options

Surface Mount box & **Ceiling Recess Mount** available.

[†]For DALI Emergency - the EM side will not report back

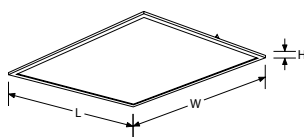

AU-BLPE6060

(L) 595mm Length
(W) 595mm Width
(H) 27mm Height

AU-BLPE1230

(L) 295mm Length
(W) 1195mm Width
(H) 27mm Height

AU-BLPE1260

(L) 1195mm Length
(W) 595mm Width
(H) 27mm Height