




Z LED ECO

Z LED ECO Highbay 3 Cool White Code: AZLE3/1/CW

| Category | High/Low Bay |
|---------------|--------------------------------------------|
| Application | Ancillary, Hospitality, Industrial, Retail |
| Specification | Performance |

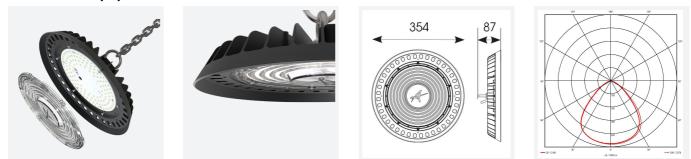

PRODUCT FEATURES

- Sleek and robust LED low/high bay for industrial applications and ancillary areas
- Lensed diffuser design helps to control the beam angle, offering better light distribution
- Integral on-board driver reduces the overall size and weight of product, resulting in a slim, lightweight and easy to install unit
- Alternative installation options by means of drop rods, jack chain and catenary wire.

| GENERAL INFORMATION | | | |
|-------------------------|--------------|--|--|
| Wattage | 200W | | |
| Lumens Delivered | 23500lm | | |
| Lm/W | 120lm/W | | |
| Beam Angle | 90 | | |
| CRI | 80 | | |
| CCT | 4000K | | |
| Input | 220/240V | | |
| Operating Temp | -45°C - 45°C | | |
| SDCM | 6 | | |
| UGR | 28 | | |
| Energy efficiency class | E | | |

- Die-cast powder coated construction and heatsink for optimum thermals and performance
- High efficiency up to 120lm/w
- Installation eye-bolt supplied as standard
- IP66 and IK09 ratings

| TECHNICAL INFORMATION | | | |
|--------------------------------|---------------------|--|--|
| Light Source | LED | | |
| Colour / Finish | Black | | |
| IP Rating | IP66 | | |
| Class Protection | 1 | | |
| Internal / External | Internal / External | | |
| Surface / Recessed / Suspended | Suspended | | |
| Lumen Depreciation | L80 54,000h | | |
| Warranty (Years) | 3 | | |
| CE Mark | Yes | | |
| Diameter | 354 mm | | |
| Height | 87 mm | | |