

# BatPacCWS™

## Colour & Wattage Switchable Battens

5 Year Warranty

L70 50,000hrs

Emergency option

Microwave sensing option

Colour switchable between 3000K, 4000K and 6500K

Wattage switchable between 21W and 37W (AU-BA1237WS)

Wattage switchable between 31W and 54W (AU-BA1554WS)

Wattage switchable between 34W and 62W (AU-BA1862WS)

IK08 rated

-20 - +45° ambient operating temperature

Microwave sensor 108° detection beam range up to 4m


Opal polycarbonate diffuser for even light distribution

Can be surface mounted or suspended




Plug and play emergency, emergency self test and microwave sensing packs available




31W 4000K




54W 4000K

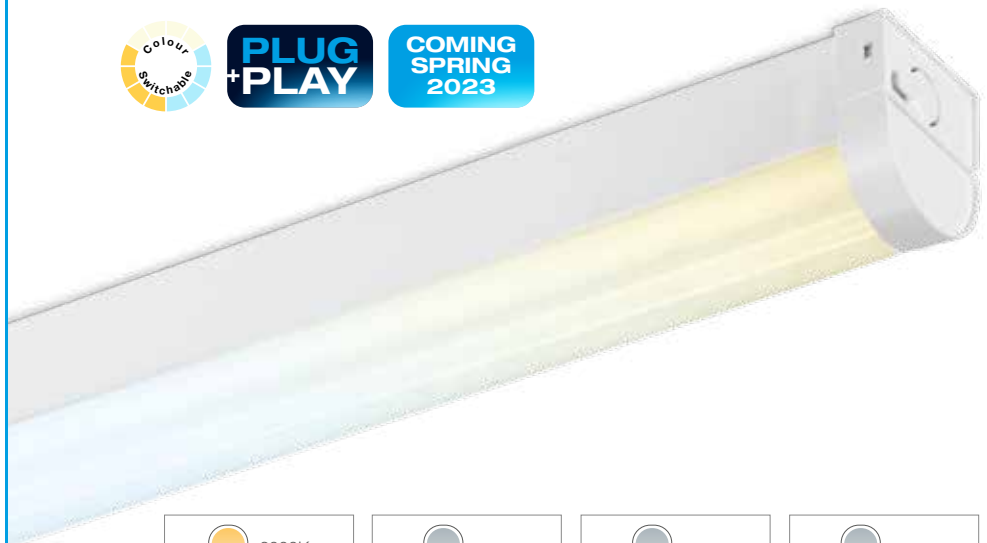


Colour Switchable



Wattage Switchable  
**AU-BA1237CWS**



Wattage Switchable  
**AU-BA1554CWS**



Wattage Switchable  
**AU-BA1862CWS**



Cat. No.	Type	Watts	Colour	Lumens	lm/W	Length (ft)
<b>Colour &amp; Wattage Switchable</b>						
<b>AU-BA1237CWS</b>	Non-Dim	21W	3000-6500K	3150lm	150	4
	Non-Dim	37W	3000-6500K	5350lm	145	4
<b>AU-BA1554CWS</b>	Non-Dim	31W	3000-6500K	4650lm	150	5
	Non-Dim	54W	3000-6500K	7850lm	145	5
<b>AU-BA1862CWS</b>	Non-Dim	34W	3000-6500K	5100lm	150	6
	Non-Dim	62W	3000-6500K	9000lm	145	6


### Accessories

**AU-EM2** Emergency Pack for BatPacCWS™

**AU-EM2ST** Emergency Self Test Pack for BatPacCWS™

**AU-BAMS** Microwave Sensor Pack for BatPacCWS™

Lumen value based on 4000K



#### **AU-BA1237CWS**

(L) 1170 mm Length  
(W) 61mm Width  
(H) 71 mm Height

#### **AU-BA1554CWS**

(L) 1470 mm Length  
(W) 61mm Width  
(H) 71 mm Height

#### **AU-BA1862CWS**

(L) 1734 mm Length  
(W) 61mm Width  
(H) 71 mm Height