

**R6™**

Single Colour Fixed Fire Rated Downlights

- Fitted with FastRFix™ connector for ease of installation and circuit testing
- Loop in loop out push-fit wiring terminals
- Low profile design for shallow ceiling voids (50mm)
- Supplied with white IP65 polycarbonate bezel
- Insulation coverable
- Patented fire rated downlight without intumescent
- Fire, acoustic and air leakage rated
- Tested in 30, 60 and 90 minute solid timber joist, plus 30 minute i-joists and metal web joist

3 hour Emergency pack AU-FRLM10EMB available.



**FASTRFIX™**



Push-Fit Wiring Terminals



Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
<b>R6™ Triac Dimmable Fixed (IP65 when used with IP65 bezel)</b>						
<b>AU-R6FF/30</b>	6W	3000K	580lm	97	60°	70mm
<b>AU-R6FF/40</b>	6W	4000K	620lm	103	60°	70mm

**Bezel Options**

- AU-R6BZ\*** R6™ Fixed IP65 Polycarbonate Bezel
- AU-AP600†** mPro™ & R Series™ Fixed Fire Rated Adaptor Plate 85-145mm

\*Add suffix **MB**, **PC** or **SN** for Matt Black, Polished Chrome or Satin Nickel finishes.  
 †Add suffix **W**, **MW**, **PC** or **SN** or for White, Matt White, Polished Chrome or Satin Nickel finishes.  
**3 hour Emergency pack AU-FRLM10EMB available.**



5 Year Warranty


L70 40,000hrs

Triac dimmable as standard


Emergency option

IP65 Polycarbonate  
 Polished Chrome, Satin  
 Nickel and Matt Black  
 bezel options

3000K



Recess Depth 50mm

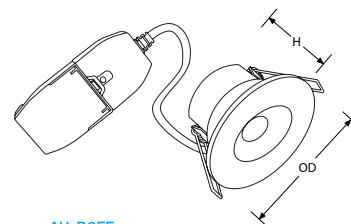

**AU-R6FF**

(H) 50mm Height  
 (OD) 88mm Overall (Ø)