

# Saletto

## Low profile panel heater

### Controls

Digitally controlled electronic thermostat accurate to (+/-0.2°C).

**Timer Modes:** 7 Day Programmable User Timer.

**Pre-programmed Timer Modes:** Out All Day, Home All Day, Away.

**Continuous Heat Modes:** Eco, Manual, Frost Protect, Setback, Runback, Off.

- Graphical display with RGB backlight
- Capacitive buttons with audio feedback
- User replaceable battery (coin-type)

### Controller Functions

- Open window detection
- Adaptive start
- Advanced time period for timer operation
- Adjustable max set point range (7-32°C)
- Bluetooth for software updates
- Child lock & Landlord lock (PIN-based)

### Safety Features

- Thermal cut-out. Auto reset type
- Overheat detection

### Colour/Finish

Metal Chassis, Air Outlet Grille & Control Moulding - Traffic White (RAL9016).

### Element

Compact, finned, mineral filled sheathed element.

### Supply

- 1.3 metres fitted, 3 core for fused spur installation
- 1/N/PE ~230-240V, 50Hz Class I with earth wire

### Guarantee

2 year UK manufacturer Guarantee.

### IP Rating

IP24




Intertek



Dimplex Control  
See page 10 for details

### Product Dimensions

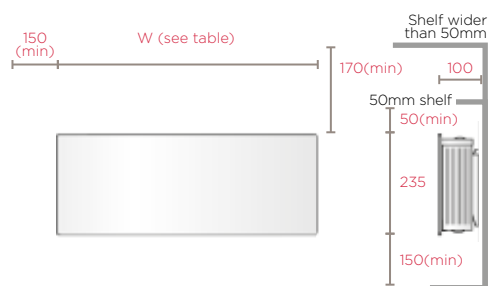

Model	Output (kW)	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
LPP050E	0.50	235	746	100	6.7
LPP075E	0.75	235	746	100	6.7
LPP100E	1.00	235	877	100	7.6
LPP150E	1.25	235	1142	100	9.9

# PLXE

## Panel heater

### Controls

Digitally controlled electronic thermostat accurate to (+/-0.2°C).

**Timer Modes:** 7 Day Programmable User Timer.

**Pre-programmed Timer Modes:** Out All Day, Home All Day, Away.

**Continuous Heat Modes:** Eco, Manual, Frost Protect, Setback, Runback, Off.

- Graphical display with RGB backlight
- Capacitive buttons with audio feedback
- User replaceable battery (coin-type)

### Controller Functions

- Open window detection
- Adaptive start
- Advanced time period for timer operation
- Adjustable max set point range (7-32°C)
- Bluetooth for software updates
- Child lock & Landlord lock (PIN-based)

### Safety Features

- Thermal cut-out. Auto reset type
- Overheat detection

### Colour/Finish

Metal Chassis, Air Outlet Grille & Control Moulding - Traffic White (RAL9016).

### Element

Compact, finned, mineral filled sheathed element.

### Supply

- 1.3 metres fitted, 3 core for fused spur installation
- 1/N/PE ~230-240V, 50Hz Class I with earth wire

### Guarantee

2 year UK manufacturer Guarantee.

### IP Rating

IP24




Intertek



Dimplex Control  
See page 10 for details

### Product Dimensions

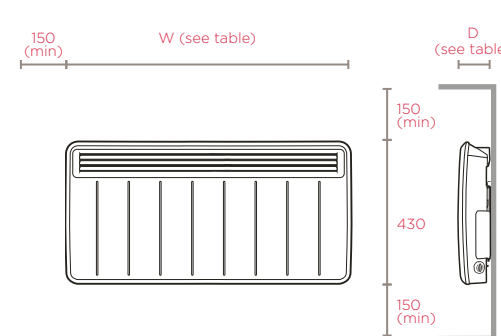

Model	Output (kW)	Height (mm)	Width (mm)	Depth (mm)	Weight (mm)
PLX050E	0.50	430	450	108	4.6
PLX075E	0.75	430	620	108	5.9
PLX100E	1.00	430	620	108	5.9
PLX125E	1.25	430	690	108	6.1
PLX150E	1.50	430	690	108	6.1
PLX200E	2.00	430	860	108	7.8
PLXC300E	3.00	430	860	143	8.7