

CFSE

Commercial fan heater with remote

Controls

Digitally controlled, accurate electronic thermostat.

Timer Modes: 7 Day Programmable User Timer.

Continuous Heat Modes: Manual, Runback, Fan Only, Off.

Bluetooth remote supplied with product as a standard.

Controller Functions

- Adaptive start
- Advanced time period for timer operation
- Adjustable max set point range (7-32°C)
- Bluetooth for control
- PIN Lock

Safety Features

- Electric reset cut-out (CFS30E) (115°C)
- Manual reset cut-out (CFS60E) (85°C)

Colour/Finish

Traffic White (RAL9016) with black grille bracket.

Supply

- 3 core for fused spur installation
- 1/N/PE ~230-240V, 50Hz Class I with earth wire

Guarantee

2 year UK manufacturer Guarantee.

IP Rating

IP24 (CFS30E)


IPX4 (CFS60E)



Intertek



Product Dimensions

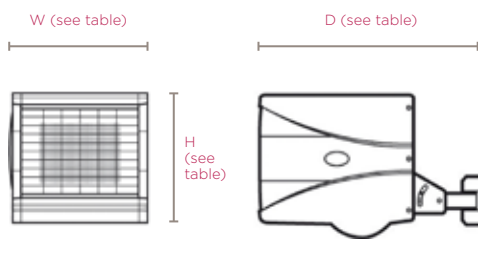

Model	Output (kW)	Air Flow (m³/h)	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
CFS30E	3.0	400	262	306	495	7.6
CFS60E	6.0	750	360	386	565	13.5

CFH

Commercial fan heater



Intertek

Controls

Low voltage master/slave system using CAT 5 PC network cable to offer system control over a maximum of 10 heaters.*

Controller Functions

- Off / fan & two heat settings
- Multi-functional digital control over time/thermostat/runback/programme/heat fan*

Safety Features

Manual reset cut-out.

- CFH60 - 85°C
- CFH90/120 - 115°C

Colour/Finish

Powder coated steel with plastic mouldings. White with black grille and bracket.

Supply


400V ~3PN.

Guarantee

1 year UK manufacturer Guarantee.

IP Rating

IPX4

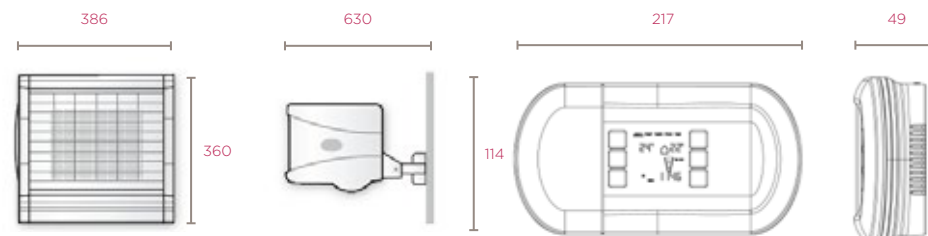

Model	Output (kW)	Air-off temp (°C)	Height (mm)	Width (mm)	Depth (mm)	Max Depth (mm)	Weight (kg)
CFH60	6.0	40	360	386	565	630	13.5
CFH90	9.0	55	360	386	565	630	14.5
CFH120	12.0	65	360	386	565	630	14.5

CFCH

Commercial wall controller

Controls

- Control up to 10 CFH heaters as one
- Accurate digital programming control
- 7 day time and temperature controls
- Full electronic thermostat with ambient and target temperatures
- 5 hour runback timer

Colour/Finish

White with grey buttons.

Supply

200-240v ~.

Guarantee

1 year UK manufacturer Guarantee.

IP Rating

No rating.

Heater to heater connections via industry standard PC network cable for quick and easy installation (CAT 5e ethernet / RJ45).



Product Dimensions

