

FX20VE / FX20EIPX4

Downflow heater

Controls

Factory-set 30 minute activation, activated and deactivated by pull cord.

Safety Features

- Electrical reset cut-out
- Non-resettable thermal fuse
- Resettable over heat detection electronic temperature limiter

Colour/Finish

White plastic case.

Construction

Double insulated plastic case. Moulded in flame retardant self-extinguishing grade nylon.

Supply

- 3 core for fused spur installation
- 1/N/PE ~230-240V, 50Hz Class I with earth wire

Guarantee

2 year UK manufacturer Guarantee.

IP Rating

FX20VE - IP22
FX20EIPX4 - IP24

Cable Entry Point

Middle, top. No cable supplied.




Intertek

FX20VE

FX20EIPX4

Product Dimensions

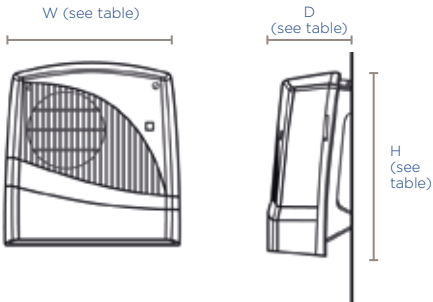

Model	Output (kW)	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
FX20VE	1/2	242	229	109	1.1
FX20EIPX4	1/2	267	250	131	1.4

BFHE

Base unit heater with remote

Controls

Digitally controlled, accurate electronic thermostat.

Timer Modes: 7 Day Programmable User Timer.

Pre-programmed Timer Modes: Manual, Frost Protect, Runback, Off.

Bluetooth remote supplied with product as standard.

Controller Functions

- Adaptive start
- Advanced time period for timer operation
- Adjustable max set point range (7-32°C)
- Bluetooth for control

Safety Features

Electrical reset, self-hold cut-out.

Colour/Finish

Air Outlet Grille options supplied with all:

- Traffic White (RAL 9016)
- Brown
- Brushed Stainless Steel

Supply

- 3 core for fused spur installation
- 1/N/PE ~230-240V, 50Hz Class I with earth wire

Guarantee

2 year UK manufacturer Guarantee.


IP Rating

No Rating.



Intertek

Product Dimensions

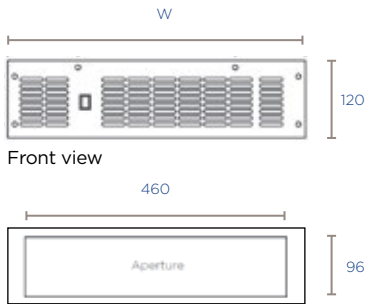

Model	Max. output (kW)	Optional output (W)	Height Front Cover (mm)	Height Chassis (mm)	Depth Front Cover (mm)	Depth Chassis (mm)	Weight (kg)
BFH24E	2.4	800, 1600	120	90	490	360	3.5