

# Cable Gland Packs



As of June 2021, these products will be added to our Loyalty scheme

Scan our QR code to be taken to our Brass Gland Calculator page



SUPPLIED IN STRONG, STURDY & RESEALABLE PACKAGING

## BW Industrial Gland Packs Brass CW614N

Standard: BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010

Function: Provides mechanical cable retention & electrical continuity via armoured wire termination in indoor area - easy to install.

Ingress Protection: IP2X


Thread: Metric

Operating Temp: -60°C to +200°C

Cable Type: Single Wire Armour (SWA) Cable

Features: Two Part Armour Lock

Code	Size
BW20S	20mm Small
BW20	20mm
BW25	25mm
BW32	32mm
BW40	40mm
BW50	50mm
BW63	63mm
BW75	75mm



## CW Industrial Gland Packs

Standard: BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010

Function: Providing environmental seal on the cable outer sheath. Also provides mechanical cable retention & electrical continuity via armoured wire termination in indoor and outdoor area with all types of SWA cable.

Ingress Protection: IP66

Thread: Metric


Operating Temp: -60°C to +125°C

Cable Type: Single Wire Armour (SWA) Cable

Seal Material: LSOH Silicone Seal & LSOH Nylon Washer

Features: Two Part Armour Lock, Outer Compression Seal

Code	Size
CW20S	20mm Small
CW20	20mm
CW25	25mm
CW32	32mm
CW40	40mm
CW50	50mm
CW63	63mm
CW75	75mm





## BW LSF Gland Packs

Size: 16mm to 90mm & 1/2" to 3 1/2"

Standard: EN/IEC 60079-0:2012+A11:2013/2011, EN/IEC 60079-1:2014, EN/IEC 60079-7:2015, EN/IEC 60079-31:2014/2013

LSF Shrouds included

Code	Size
LBW20S	20mm Small
LBW20	20mm
LBW25	25mm
LBW32	32mm
LBW40	40mm
LBW50	50mm
LBW63	63mm
LBW75	75mm

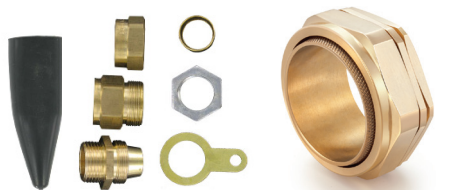

## CW LSF Gland Packs

Standard: BS 6121: Part-1:2005, EN 50262:1999, IEC62444:2010

Function: Providing environmental seal on the cable outer sheath. Also provides mechanical cable retention & electrical continuity via armoured wire termination in indoor and outdoor area with all types of SWA cable.

Ingress Protection: IP66

Thread: Metric

Operating Temp: -60°C to +125°C

Cable Type: Single Wire Armour (SWA) Cable

Seal Material: LSOH Silicone Seal & LSOH Nylon Washer

Features: Two Part Armour Lock, Outer Compression Seal

LSF Shrouds included

Code	Size
LCW20S	20mm Small
LCW20	20mm
LCW25	25mm
LCW32	32mm
LCW40	40mm
LCW50	50mm
LCW63	63mm
LCW75	75mm

