



FLEX7 EXPANSION & TAP-OFF DISTRIBUTION BOX DIMENSIONS

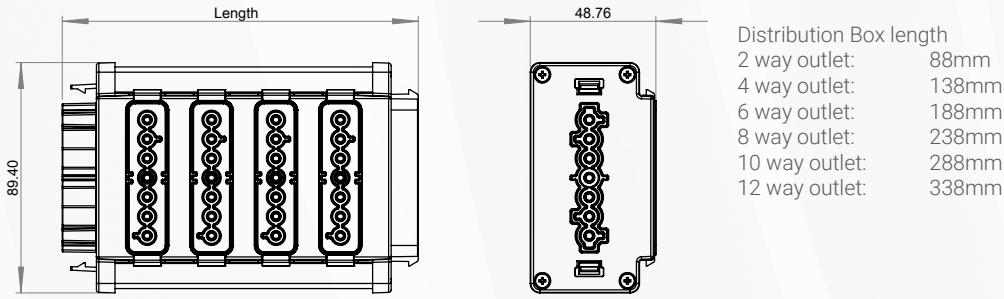

FLEX7 EXPANSION & TAP-OFF DISTRIBUTION BOX

SUPPLY VOLTAGE:	230V~
CURRENT RATING:	16A
FREQUENCY:	50Hz
TERMINAL CAPACITY (SOCKET):	N/A
CABLE ENTRY (KNOCKOUT):	N/A
MATERIAL SPECIFICATION:	PA6, Halogen Free, UL94, V0
INGRESS PROTECTION:	IP2X
OPERATING TEMPERATURE RANGE:	-5°C / +40°C

HUB DIMENSIONS

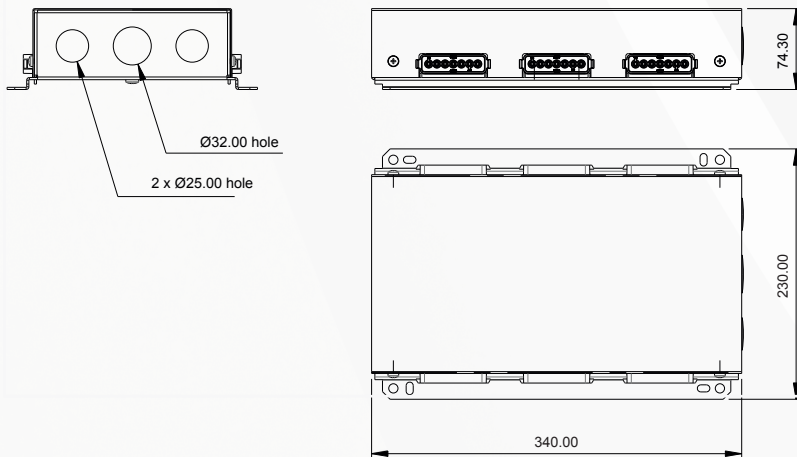

HUBS

SUPPLY VOLTAGE:	400V~
CURRENT RATING:	16A
FREQUENCY:	50Hz
TERMINAL CAPACITY (SOCKET):	3 x 2.50mm ² , 2 x 4.00mm ² , 1 x 6.00mm ²
MATERIAL SPECIFICATION:	1.20mm - 2.00mm thick mild steel
INGRESS PROTECTION:	IP2X
OPERATING TEMPERATURE:	-5°C / +40°C