

DENALI

Aluminium bulkhead for commercial outdoor areas



DENALI WITH THE STANDARD CIRCULAR BEZEL

DENALI WITH THE EYELID BEZEL



APPLICATIONS

- Exterior walkways and stairs
- Building perimeters

CONSTRUCTION

- Die-cast aluminium base and bezel, with light-textured UV stable dark grey paint finish to RAL7010
- Polycarbonate opal diffuser
- Piano-key terminal block with capacity for 2 x 1.5mm² cable for loop-in/loop-out
- Twin cable entry points with grommets.


TECHNICAL DETAILS

- 140 lm/W
- LEDs on metal core PCB
- **Circular bezel**
15W nom., 18.3W act., 1,759 lm, 96 l.lm/c.W
- **Eyelid bezel**
15W nom., 17W act., 1,295 lm, 76 l.lm/c.W
- CRI >80
- CCT 4000K
- Branded ENEC approved, flicker free, LED driver
- Emergency maintained 3 hours versions (suffix M3L) available, as listed


OPTIONS

DIMMING Dim-to-10% (corridor function) available on all variants. Add suffix CF.

SENSOR Available with micro-wave occupancy sensor fitted on all versions except M3L. Add suffix MW.

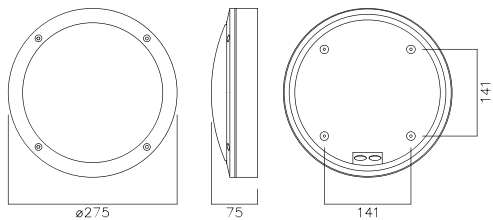

PLAIN TRIM

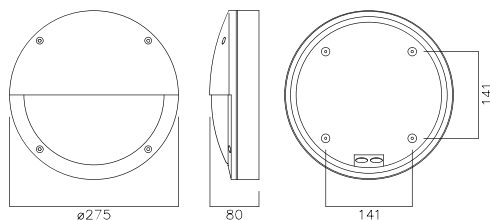

EYELID TRIM

ORDER CODE	DESCRIPTION
NDE15/840	Denali 15W LED IP65 Ali Bulkhead 840
NDE15/M3L/840	Denali 15W LED IP65 Ali Bulkhead M3 Lithium 840
NDE15/ELID/840	Denali 15W LED IP65 Eyelid Ali Bulkhead 840
NDE15/ELID/M3L/840	Denali 15W LED IP65 Eyelid Ali Bulkhead M3 Lithium 840