



LOW SMOKE HALOGEN FREE (LSHF) FLEXIBLE CABLE

RATED VOLTAGE:	300V / 500V
CONDUCTOR SPECIFICATION:	Class 5, Copper to EN 60228
CONDUCTOR INSULATION:	Low Smoke Halogen Free (TI6)
SHEATH/JACKET INSULATION:	Low Smoke Halogen Free (TM7)
CONFORMANCE:	3-5 Core: BS EN 50525-3-11, H05Z1Z1-F 2-Core & 6-7 CORE: BS EN 50525-3-11 (construction, testing & performance although standard only caters for 3-5 core products), 05Z1Z1-F CPR (System 1+) - Cca s1b, d1, a1

LOW SMOKE HALOGEN FREE CABLE CONDUCTOR COLOURS

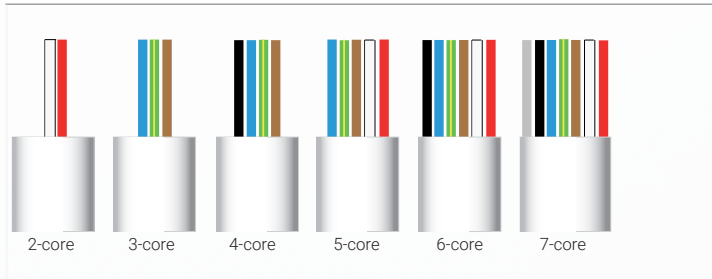

FLEX7 CONTROL MODULE DIMENSIONS

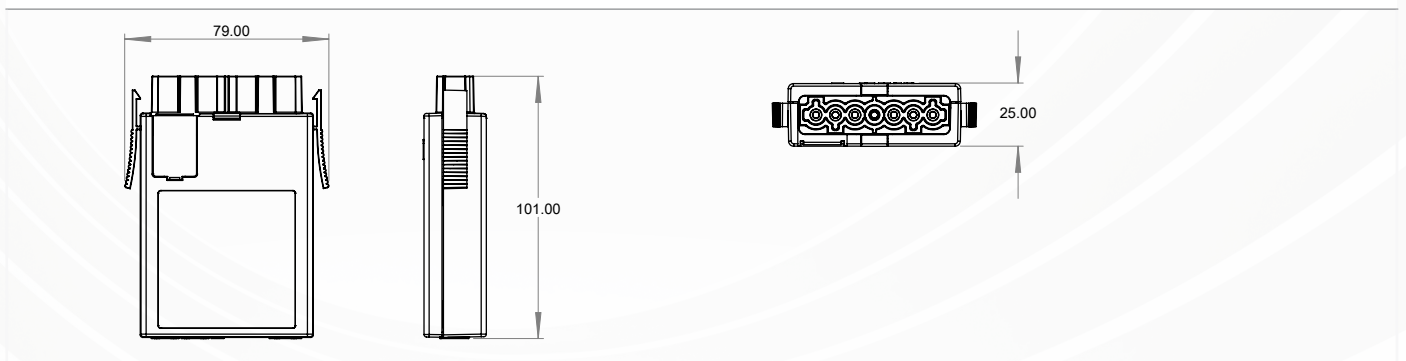

FLEX7 CONTROL MODULE

SUPPLY VOLTAGE:	230V~
CURRENT RATING:	6A
FREQUENCY	50Hz
MATERIAL SPECIFICATION (MOULDED):	PA6, Halogen Free, UL94, V0
INGRESS PROTECTION:	IP2X
OPERATING TEMPERATURE RANGE:	-5°C / +40°C