



# ISOLATORS – IS RANGE

## KEYWORDS:

100 and 125A; 1, 2, 3, 4 pole; Consumer unit mount; Distribution board mount

## Construction and Features

- For use with the CPN range of Consumer Units, Enclosures and Distribution Boards
- Used as an incoming control device - isolator
- Capable of switching electrical circuits with load
- Number of poles: 1, 2, 3, 4
- Rated current (A): 100, 125
- Rated voltage: 230/400V AC
- Rated frequency: 50/60Hz
- Connection capacity: 35mm<sup>2</sup> conductor
- Connection: pillar terminal with clamp
- Installation: DIN rail 35mm; panel mount

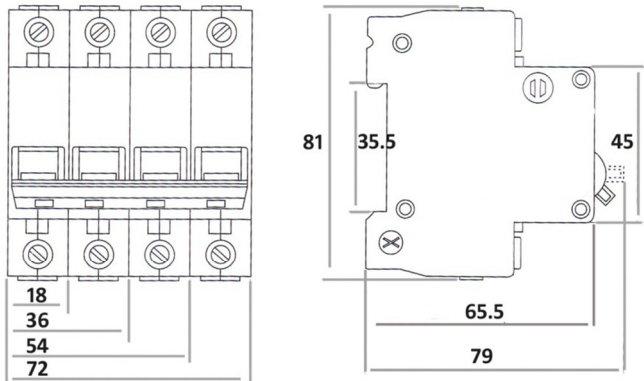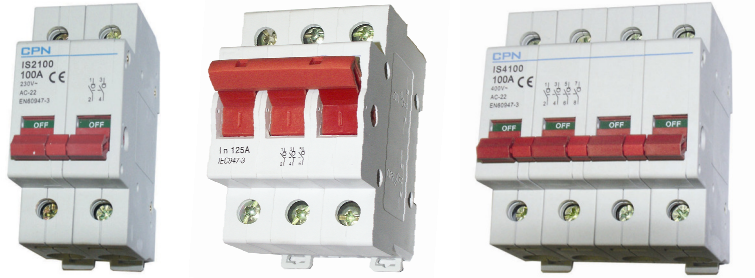

100A			125A		
<b>IS1100</b>	1 pole 100A	<b>Box quantity 12</b>	<b>IS1125</b>	1 pole 125A	<b>Box quantity 12</b>
<b>IS2100</b>	2 pole 100A	<b>Box quantity 6</b>	<b>IS2125</b>	2 pole 125A	<b>Box quantity 6</b>
<b>IS3100</b>	3 pole 100A	<b>Box quantity 4</b>	<b>IS3125</b>	3 pole 125A	<b>Box quantity 4</b>
<b>IS4100</b>	4 pole 100A	<b>Box quantity 3</b>	<b>IS4125</b>	4 pole 125A	<b>Box quantity 3</b>

## Additional items for use with IS range

- CU range of insulated consumer units – page xx
- ECU and CU ranges of insulated mini-consumer units – page xx
- CU/M range of metal consumer units and metal enclosures – page xx