

IP65 LED Floodlight With Photocell

178

FLOODLIGHTING



AVAILABLE FINISHES




COLOUR TEMPERATURE



CODE	DESCRIPTION
OV101100BKCWPC	100W Floodlight With Photocell - 4000K - Black

PRODUCT INFO	
CCT (K)	4000K
Lumens	9000lm
Efficacy	90lm/W
Wattage	100W
CRI	>80
Beam Angle	110°
LED Lifetime	30,000 Hours
Voltage	220-240V~
Frequency	50/60Hz
Operating Temp	-20°C - +45°C
Ambient Light 'ON'	10 - 20 Lux
Ambient Light 'OFF'	30 - 60 Lux

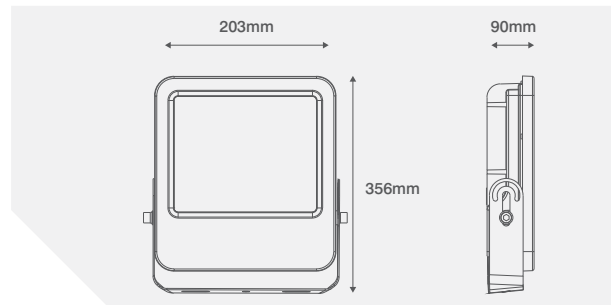

Prewired with 1 metre flylead

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-5 EN 55015 EN 61547 EN 62471 EN 62493 EN61000-3-2 EN61000-3-3



IP65 LED Floodlight With Photocell

179

FLOODLIGHTING



AVAILABLE FINISHES




COLOUR TEMPERATURE



PRODUCT INFO	
CCT (K)	4000K
Lumens	13500lm
Efficacy	90lm/W
Wattage	150W
CRI	>80
Beam Angle	110°
LED Lifetime	30,000 Hours
Voltage	220-240V~
Frequency	50/60Hz
Operating Temp	-20°C - +45°C
Ambient Light 'ON'	10 - 20 Lux
Ambient Light 'OFF'	30 - 60 Lux

CODE	DESCRIPTION
OV101150BKCWPC	150W Floodlight With Photocell - 4000K - Black

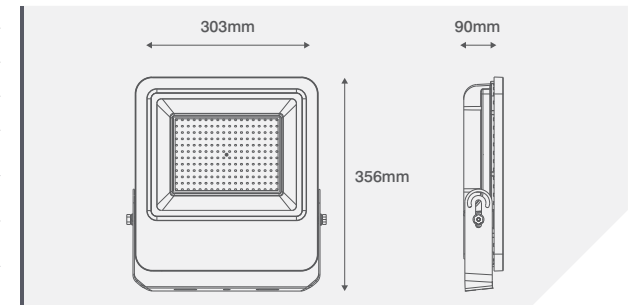

PRODUCT APPROVALS

Prewired with 1 metre flylead

EN 60598-1 EN 60598-2-5 EN 55015 EN 61547 EN 62471 EN 62493 EN61000-3-2 EN61000-3-3

