


4.8W Dimmable IP65 LED Downlights



AVAILABLE FINISHES



COLOUR TEMPERATURE



CODE DESCRIPTION


OV5400WH5WD	Fixed Downlight - 2700K - White
OV5400CH5WD	Fixed Downlight - 2700K - Chrome
OV5400SC5WD	Fixed Downlight - 2700K - Satin Chrome
OV5400WH5CD	Fixed Downlight - 4000K - White
OV5400CH5CD	Fixed Downlight - 4000K - Chrome
OV5400SC5CD	Fixed Downlight - 4000K - Satin Chrome

COMPATIBLE PRODUCTS

OVSP4120**	130mm Diameter (65mm Aperture) Converter Plate	page 38
OVISC1020	Insulation Support Bracket	page 39
OVEMCG2305M3	3 Hour Universal Emergency Pack with prewired Flow Connectors	page 50

PRODUCT INFO

CCT (K)	2700K	4000K
Lumens	400lm	450lm
Efficacy	71lm/W	81lm/W
Wattage	4.8W	
CRI	>80	
Beam Angle	40°	
LED Lifetime	25,000 Hours	
Voltage	220-240V~	
Frequency	50Hz	
Dimmable	Yes	
Operating Temp	-15°C - +40°C	

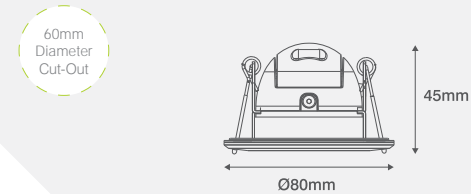

Complete with prewired Flow™ Connector

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 55015 EN 61547 BS EN 62493 EN 61000-3-2 EN 61000-3-3
Fire Rating 30, 60 & 90 minutes Acoustic Rating 0dB (zero impact on sound insulation) Air Flow BS 5250: 2011 compliant



4.8W Dimmable IP54 LED Downlights

AVAILABLE FINISHES



COLOUR TEMPERATURE



CODE DESCRIPTION


OV5405WH5WD	Adjustable Downlight - 2700K - White
OV5405CH5WD	Adjustable Downlight - 2700K - Chrome
OV5405SC5WD	Adjustable Downlight - 2700K - Satin Chrome
OV5405WH5CD	Adjustable Downlight - 4000K - White
OV5405CH5CD	Adjustable Downlight - 4000K - Chrome
OV5405SC5CD	Adjustable Downlight - 4000K - Satin Chrome

COMPATIBLE PRODUCTS

OVSP3120**	130mm Diameter (75mm Aperture) Converter Plate	page 38
OVISC1020	Insulation Support Bracket	page 39
OVEMCG2305M3	3 Hour Universal Emergency Pack with prewired Flow Connectors	page 50

PRODUCT INFO

CCT (K)	2700K	4000K
Lumens	400lm	450lm
Efficacy	71lm/W	81lm/W
Wattage	4.8W	
CRI	>80	
Beam Angle	40°	
LED Lifetime	25,000 Hours	
Voltage	220-240V~	
Frequency	50Hz	
Dimmable	Yes	
Operating Temp	-15°C - +40°C	
Adjustable Angle	20°	

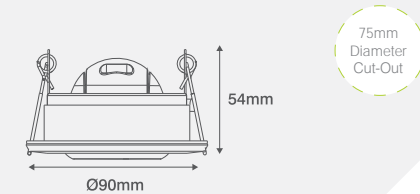

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-1 EN 55015 EN 61547 BS EN 62493 EN 61000-3-2 EN 61000-3-3
Fire Rating 30, 60 & 90 minutes Acoustic Rating 0dB (zero impact on sound insulation) Air Flow BS 5250: 2011 compliant

Complete with prewired Flow™ Connector

