


Adaptable Downlight With CTA Switch



AVAILABLE FINISHES



COLOUR TEMPERATURE




CODE	DESCRIPTION
OV6406	6W 140mm Diameter Downlight - White

COMPATIBLE PRODUCTS	See page 128
OVBZ646SC	Fascia Ring For 6W Downlight - Satin Chrome
OVBZ646CH	Fascia Ring For 6W Downlight - Chrome
OVBZ646BK	Fascia Ring For 6W Downlight - Black

PRODUCT INFO			
CCT (K)	3000K	4000K	6000K
Lumens	409lm	453lm	425lm
Efficacy	68lm/W	76lm/W	71lm/W
Wattage	6W		
CRI	>80		
Beam Angle	110°		
LED Lifetime	30,000 Hours		
Voltage	240V~		
Frequency	50/60Hz		
Dimmable	Non-Dimmable		
Operating Temp	-20°C - +40°C		

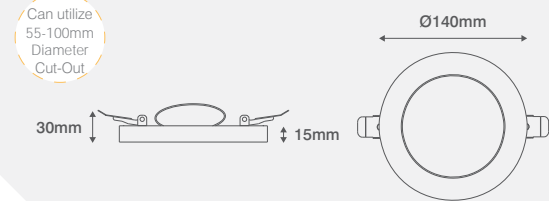

Prewired with 180mm flylead

PRODUCT APPROVALS

EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547 EN 62471 EN 62493



Adaptable Downlight With CTA Switch

AVAILABLE FINISHES



COLOUR TEMPERATURE




PRODUCT INFO			
CCT (K)	3000K	4000K	6000K
Lumens	993lm	1035lm	992lm
Efficacy	83lm/W	86lm/W	83lm/W
Wattage	12W		
CRI	>80		
Beam Angle	110°		
LED Lifetime	30,000 Hours		
Voltage	240V~		
Frequency	50/60Hz		
Dimmable	Non-Dimmable		
Operating Temp	-20°C - +40°C		

CODE	DESCRIPTION
OV6412	12W 165mm Diameter Downlight - White

COMPATIBLE PRODUCTS	See page 128
OVBZ6412SC	Fascia Ring For 12W Downlight - Satin Chrome
OVBZ6412CH	Fascia Ring For 12W Downlight - Chrome
OVBZ6412BK	Fascia Ring For 12W Downlight - Black

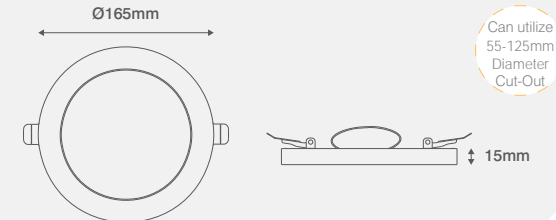

PRODUCT APPROVALS

Prewired with 150mm flylead

EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547 EN 62471 EN 62493

