


IP44 1200mm x 300mm LED Panel

118  
COMMERCIAL



AVAILABLE FINISHES

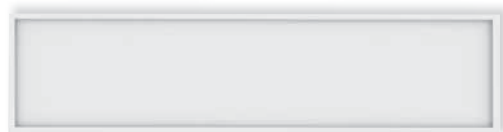

COLOUR TEMPERATURE




| CODE      | DESCRIPTION                   |
|-----------|-------------------------------|
| OV75302CW | 30W LED Panel - 4000K - White |

COMPATIBLE PRODUCTS

|           |                                  |              |
|-----------|----------------------------------|--------------|
| OVEMCG50  | 3 Hour Emergency Pack            | See page 121 |
| OVSURF732 | 1200mm x 300mm Surface Frame Kit | See page 120 |
| OVSUSP733 | Suspension Wire Kit              | See page 120 |

PRODUCT INFO

|                     |               |
|---------------------|---------------|
| CCT (K)             | 4000K         |
| Lumens              | 3250lm        |
| Efficacy            | 105lm/W       |
| Wattage             | 30W           |
| CRI                 | >80           |
| Beam Angle          | 90°           |
| LED Lifetime        | 30,000 Hours  |
| Voltage             | 220-240V ~    |
| Frequency           | 50/60Hz       |
| Dimmable            | Non-Dimmable  |
| Operating Temp      | -20°C - +40°C |
| UGR                 | <19           |
| Flammability Rating | TP(a)         |

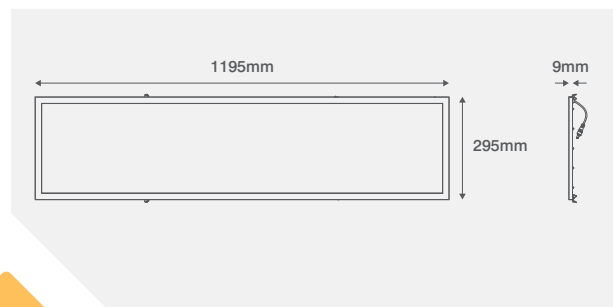

Complete with Remote Driver & prewired Flow™ Connector

PRODUCT APPROVALS


EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547 EN 61535



600mm x 600mm LED Panels

119  
COMMERCIAL

AVAILABLE FINISHES



COLOUR TEMPERATURE




| CODE      | DESCRIPTION                   |
|-----------|-------------------------------|
| OV73301WW | 30W LED Panel - 3000K - White |
| OV73301CW | 30W LED Panel - 4000K - White |
| OV73301DL | 30W LED Panel - 6000K - White |

PRODUCT INFO

|                |               |        |        |
|----------------|---------------|--------|--------|
| CCT (K)        | 3000K         | 4000K  | 6000K  |
| Lumens         | 2850lm        | 2900lm | 2900lm |
| Efficacy       | 95lm/W        | 97lm/W | 97lm/W |
| Wattage        | 30W           |        |        |
| CRI            | >80           |        |        |
| Beam Angle     | 120°          |        |        |
| LED Lifetime   | 30,000 Hours  |        |        |
| Voltage        | 220-240V ~    |        |        |
| Frequency      | 50/60Hz       |        |        |
| Dimmable       | Non-Dimmable  |        |        |
| Operating Temp | -20°C - +40°C |        |        |

COMPATIBLE PRODUCTS

|           |                                 |              |
|-----------|---------------------------------|--------------|
| OVEMCG50  | 3 Hour Emergency Pack           | See page 121 |
| OVSURF731 | 600mm x 600mm Surface Frame Kit | See page 120 |
| OVREC731  | 600mm x 600mm Recess Frame Kit  | See page 120 |
| OVSUSP731 | Suspension Wire Kit             | See page 120 |

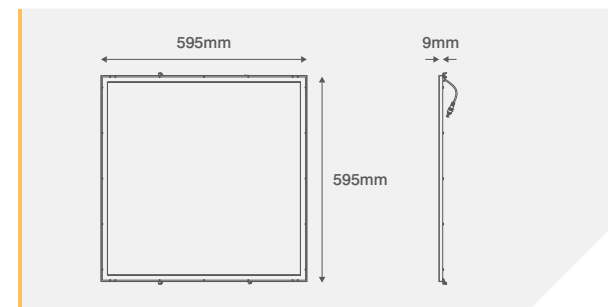

PRODUCT APPROVALS

Complete with Remote Driver

EN 60598-1 EN 60598-2-2 EN 55015 EN 61000-3-2 EN 61000-3-3 EN 61547

