

INCEPTOR® B-LITE



Technical Specification

Product Code: OV82180

Luckinslive 422179881



Description: 50-70W 1800mm Multi-Current Linear LED Batten

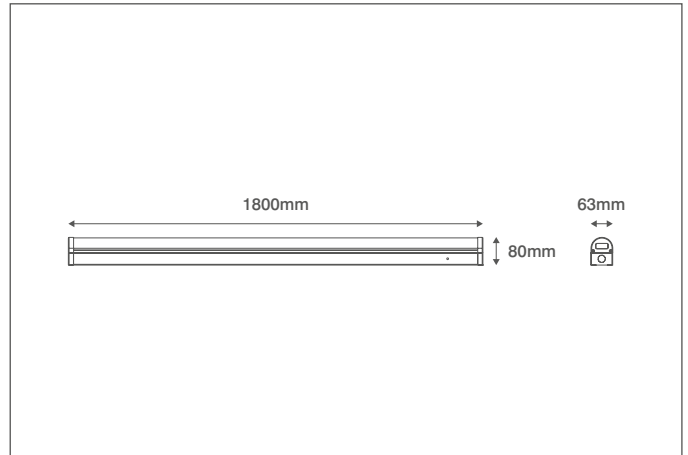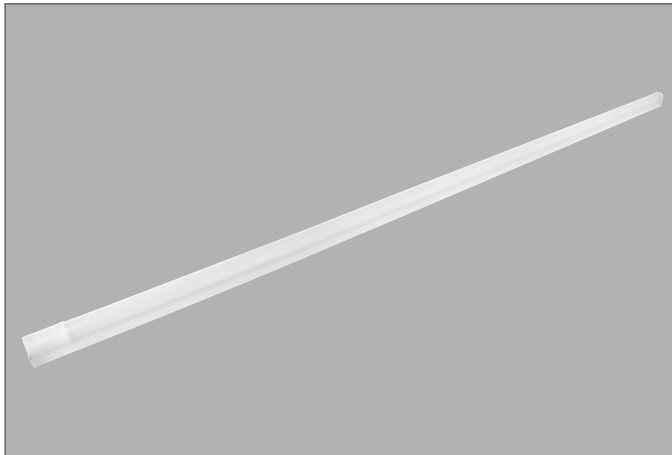

General Information

Dimensions (mm)	1800 (L) x 63 (W) x 80 (D)
Materials	Base: Powder Coated Steel; Opaque Diffuser: Polycarbonate
Base Finish	White (RAL 9003)
Product Weight (Kg)	1.9
Ingress Protection	IP20
Impact Rating (IK)	08
Mounting	Ceiling or Wall
Warranty (Years)	5
On Site Warranty	1 Year Unregistered, 2 Year Registered (https://oviauk.com/on_site_warranty)

Luminaire Output

LED Wattage	50	58	64	70
Circuit Wattage	50	58	64	70
Typical Luminous Flux	5250	6090	6720	7350
Efficacy	105	105	105	105
Beam Angle (°)	120			
Colour Temperature (K)	4000			
Flicker Free	Yes			
Colour Rendering Index (CRI)	>80			
LED Lifetime (L70)	50000			

Supply & Power Information


Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	50/58/64/70
Input Current (A)	360
Inrush Current	0.36A (<0.5S)
Power Factor	>0.9
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	+80
Input Terminations	3 Pole Push Fit Terminals

Dimming Information


Dimmable	No
----------	----

Compatible Accessories


OSUSS15 - 2 x Suspension Cable for Linear Luminaires

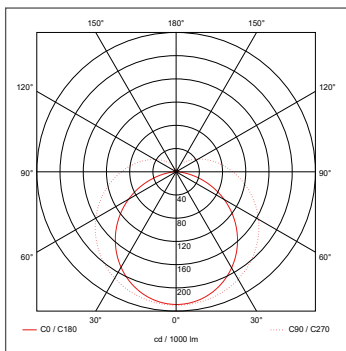


50W

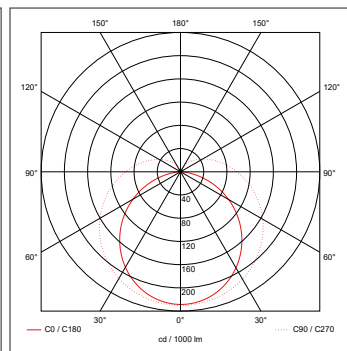

58W

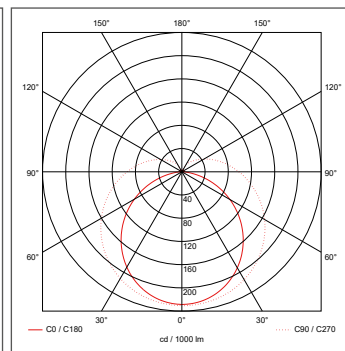

64W

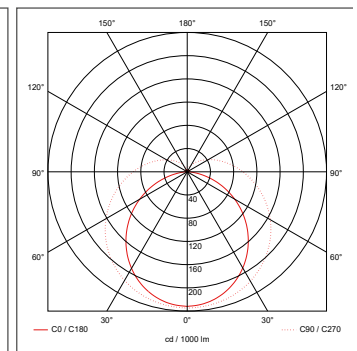

70W



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

