


## LED EMERGENCY HANGING EXIT SIGN LIGHT

White / 2.3W / 6000K / 171 lm / 25,000 hrs

- Remote connection box complete with adjustable length suspension cable (max 80cm)
- Supplied with a double-sided down arrow exit legend - left/right & up arrow legends available separately
- 3 hour maintained mode as standard which can also be configured for non-maintained or remote switched operation
- Viewing distance 29m
- Test button and LED charge light
- **SIGNLEDEM3**: M.O.M: 1 / O.P.Q: 6
- **SIGNLGD/UP**: M.O.M: 1 / O.P.Q: 100

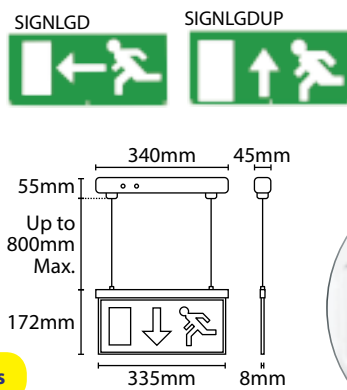


All legends comply with current regulations

## IP65 LED TWINSPOT EMERGENCY FITTING

White / 7W (2 x 3W) / 3500K / 441 lm / 30,000 hrs / IP65

- Twin 3W LED projectors: provide superior light output to traditional twin spot fittings
- Horizontally and vertically adjustable heads, 180° rotation across the horizontal plane
- IP65 rating utilising high quality polycarbonate enclosure: for installation in wet or dusty environments
- Individual indicator to show 'Lamps Healthy' and 'Charge'
- Reduced battery capacity requirement: allows a more compact design reducing the weight dramatically compared to traditional products facilitating easier installation
- Minimum 3 hour non-maintained functionality in emergency mode
- M.O.M: 1 / O.P.Q: 6

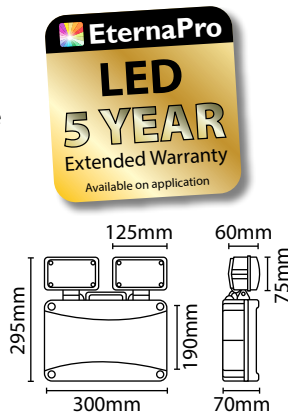


## IP20 LED EMERGENCY TWINSPOT FITTING

White / 3.4W / 6000K / 405 lm / IP20


Reduced battery capacity requirement allows a more compact design reducing the weight dramatically compared to traditional products facilitating easier installation.

- Polycarbonate construction
- Individual indicator to show 'Lamps Healthy' and 'Charge'
- Horizontally and vertically adjustable heads, 180° rotation across the horizontal plane
- 3 hour non-maintained operation
- M.O.M: 1 / O.P.Q: 6

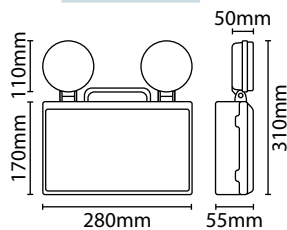


## EMERGENCY BATTERY PACK FOR ETERNA LED FITTINGS

White / 65W Max / IP20

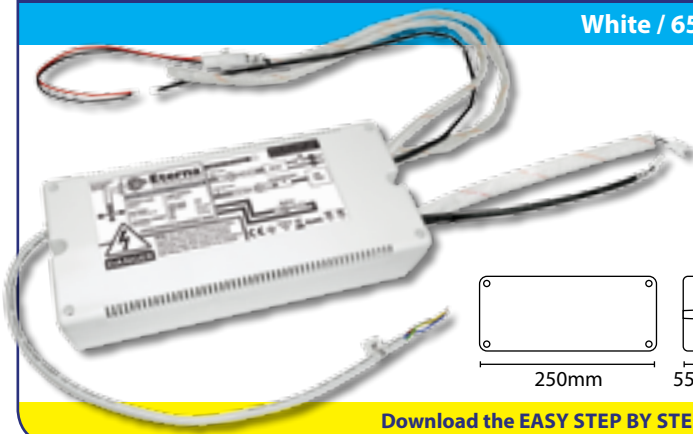

- Enables Eterna LED commercial downlights (RDL range on [PAGE 49](#)) and LED panel lights (See [PAGE 26-27](#)) to be converted into emergency luminaires, rated at 65W max
- 3 hours duration in emergency mode
- Push fit plug and socket: allows quick & easy installation
- Facility for non maintained mode and for remote switching
- LED charge light
- Control gear can be removed from the housing: allows use in installations with smaller hole cut out
- M.O.M = 1 / O.P.Q = 1

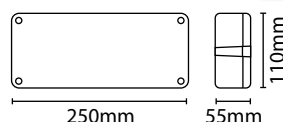

Download the EASY STEP BY STEP WIRING GUIDE from: [www.eterna-lighting.co.uk/product/ebpm3/](http://www.eterna-lighting.co.uk/product/ebpm3/)