

5-in-1



Emergency Exit Sign from Channel Safety Systems



Emergency
Lighting



IP 50

Features
Optional
Remote
Control



Emergency Exit Sign

The 5-in-1 emergency exit sign means you will always have the correct mounting method. The 5-in-1 is supplied with a full legend set and is further enhanced by our unique remote control testing option. It can be installed in both switchable maintained or non-maintained option.

Features

- 5 Mounting options supplied as standard
 - Wall
 - Ceiling
 - Flag
 - Recessed
 - Suspended
- Maintained or Non-maintained 3 hour emergency back-up
- Incorporates 3.6V 1.5Ah NiCd battery
- Low environmental impact
- Minimal maintenance
- Meets BS EN 60598-2-22 and other relevant standards




Optional Remote Control

- Press once for 5 second monthly test
- Press twice for 3 hour yearly test
- LED confirms pass/fail status
- No need to remove/restore power

Viewing Distance: (metres)




Note: Image not to scale and for pictorial reference only

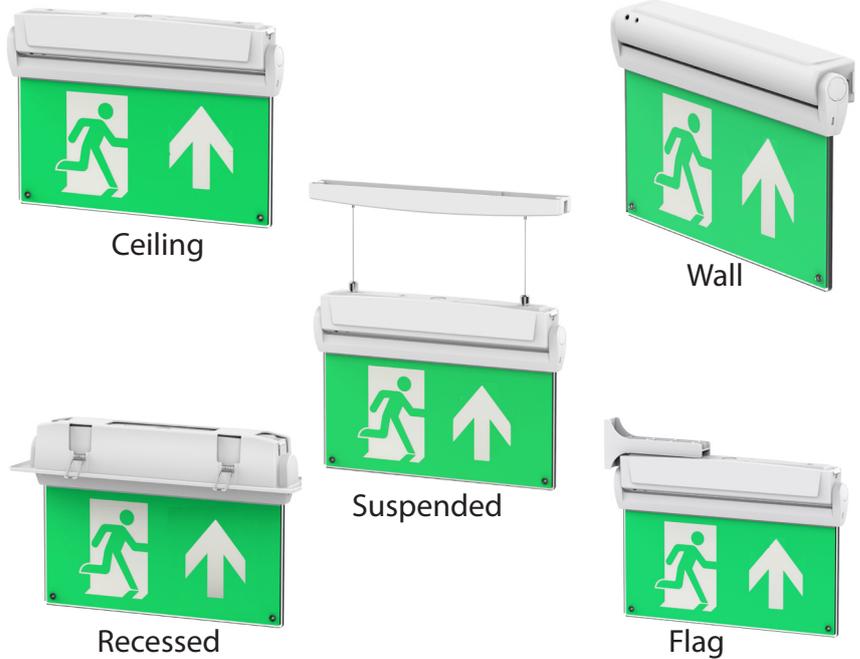

SPECIFICATIONS

| | |
|-------------------------------------|---|
| Light Source | SMT LED 3W |
| IP Rating | IP50 |
| Emergency Duration | 3 hours (minimum) |
| Mains Voltage | 230V 50Hz ± 10% |
| Mains Current | (max) 150mA (max) 35mA quiescent (3W) |
| Recharge Period | Less than 24 hour |
| Charge Indicator Integral green LED | Integral green LED & red fault LED |
| Changeover Voltage | As per the requirements of BS EN 60598-2-22 |
| Temperature Range | 5°C to 40°C |
| Weight | 800gm |
| Battery | 3.6V 800mAh Nickel Cadmium |
| Material & Finish | Polycarbonate construction, white finish |
| Size | 344W x 237H X 42Dmm (Excludes brackets) |

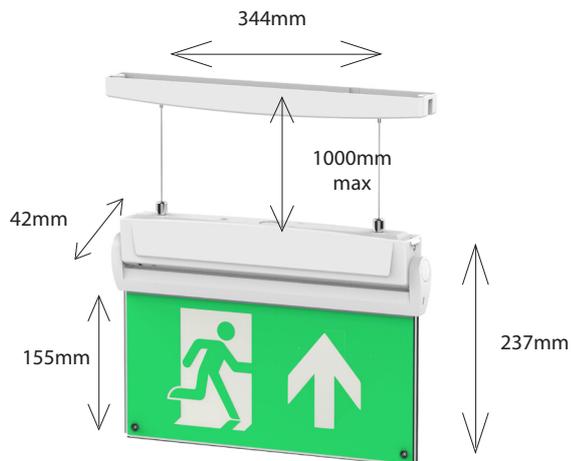

www.channelsafety.co.uk

Tel: 0845 884 7000

Email: sales@channelsafety.co.uk

| PRODUCT CODE | DESCRIPTION |
|--------------|--|
| E/5in1 | 5-in-1 LED exit sign c/w full legend set and five mounting option brackets |
| E/EM/RC | Remote control test unit (Optional) |

Errors & omissions excluded. Specification is subject to change without notice.

revision 017-1