



Available finish:- Black

**Read these instructions before commencing installation & retain them for future reference.**

**IP44** **240V 7W**

**Important Information**

It is recommended that luminaires are installed by a qualified electrician. The installation of this product must comply with the current edition of the IEE wiring regulations BS7671.


These products are designed for connection to a 240V 50Hz supply. Any damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

**Important User Advice**

Always switch off mains supply before installation or servicing. KSR recommends a maintenance schedule of washing down with soapy water (no abrasive cleaners).


**Installation Details**

- Remove and retain the diffuser by carefully releasing the 4 tabs (2 each side).
- Remove the single screw and retain to the cable cover.
- Fix the plastic back plate to wall using suitable fixings for the substrate.
- Connect the supply to the terminal block: Brown (Live) and Blue (Neutral) as per Fig. 1.
- Refit the cable cover.
- Attach the diffuser back on to the bulkhead.
- Switch on supply and test.

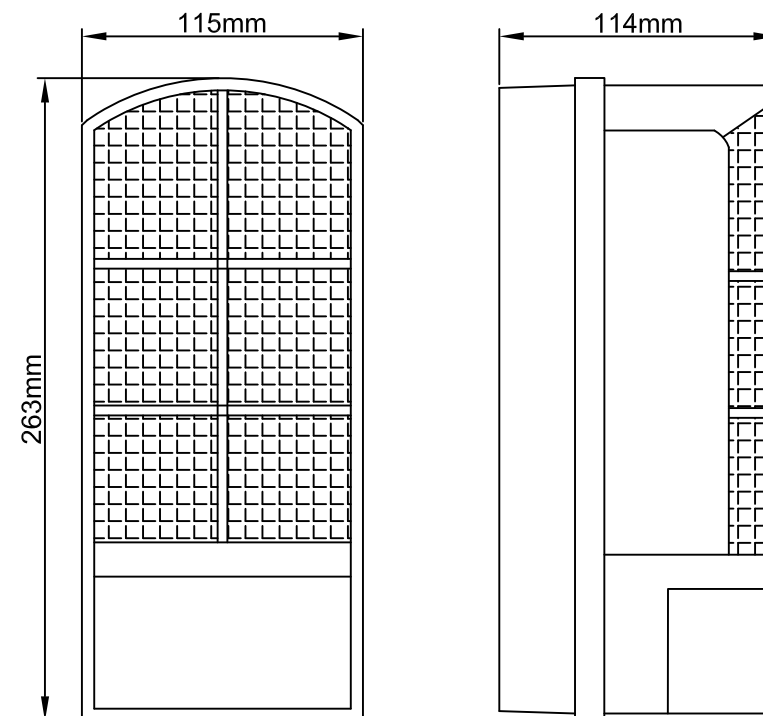

**KSR1155**

Fig. 1

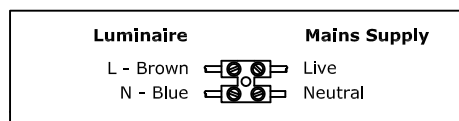

**Lamp Details**

Light Source: Dedicated LED  
 Wattage: 7W  
 Lumen Output: 600 Lumens  
 CRI: 85  
 Colour: 4000K

