IWH660- WIRE HANGER

Description:

Steel Wire hanger designed for light duty suspension of services from concrete celings using wire or strap hangers.

Material:

Steel

Additional Notes:

This item comes in one size which is 60mm.



OTHER ADDITIONAL INFORMATION

USAGE

Our Wire Hangers are specifically designed for the light duty suspension of services from concrete ceilings using wire or strap hangers. Applications include cable tray, ductwork, electrical trunking and lighting, suspended ceilings and pipework. Although traditionally used for vertical suspension they may be used at angles up to 30° from the vertical for suspension using adjustable wire rope systems. Punched banding and right angle strapping can be bolted using M6 machine screws.

TECHNICAL FEATURES

Carbon steel zinc plated body with chromate passivation.

Three segment carbon steel expander clip for even expansion pressure. 6.5mm diameter eye in flat pressed section for bolting strap with M6 machine screws.

Follow up expansion feature ensures automatic setting


ADVANTAGES


- Quick and easy installation
- Reliable setting
- High load capacity

RECOMMENDED TENSILE LOAD - Kn				
CONCRETE 26N/mm2	1.3			

WIRE HANGER SIZE AND INSTALLATION

Size	CODE	HOLD DIAMETER	HOLE DEPTH	EYE HOLE DIAMETER	BOX QTY
6 x 60	IWH660	6mm	45mm	6.5mm	100



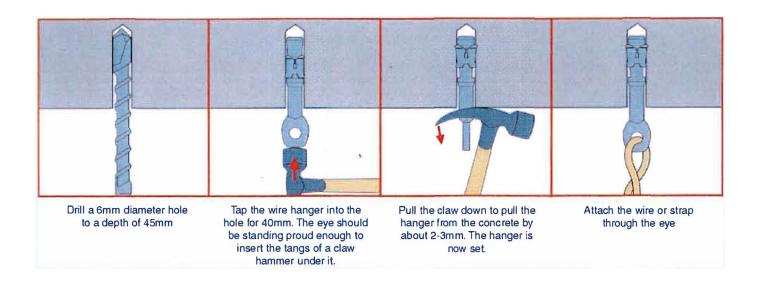

Deligo Ltd 2017 - This document is provided to the public for information purposes only and is subjected to change without notice, Deligo Ltd make no promise of the document keeping the information contained within.

EMAIL: Sales@Deligo.co.uk PHONE: +44 (0)1384 824 100 FAX: +44 (0)1384 825 077 FIXINGS, FASTENERS & ACCESSORIES FOR THE ELECTRICAL WHOLESALER

