



# FESTOON KITS

## 110V MULTI-HEAD FESTOONS



Our popular range of Festoon Kits are available in 22m and 50m lengths. The tough, unique head design is perfect for the rigours of site use and feature fixing eyelets for safe, reliable installation.


### Features

- Designed in the UK by Red Arrow
- Tough, IK08 light heads
- Unique fixing eyelets for screw or cable tie
- Supplied with handy, strong, storage & carry bag

### Specification


|                             |                     |
|-----------------------------|---------------------|
| <b>Material:</b>            | Polycarbonate Heads |
| <b>Colour Temperature:</b>  | 6500K               |
| <b>Colour Finish:</b>       | Yellow              |
| <b>CRI</b>                  | Ra>80               |
| <b>LED Lifetime:</b>        | L70B50 35,000 Hrs   |
| <b>IP Rating:</b>           | IP44                |
| <b>IK Rating:</b>           | IK08                |
| <b>Working Temperature:</b> | -20°C to 40°C       |
| <b>Power Factor</b>         | 0.85                |
| <b>Electrical Class:</b>    | Class I             |
| <b>Guarantee:</b>           | 2 Years             |

### Dimensions

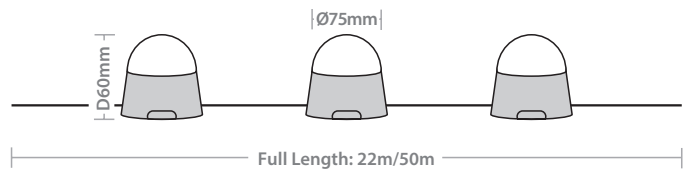

| Product Codes   | No. of Heads | Overall Length |
|-----------------|--------------|----------------|
| <b>FK2250W</b>  | 10           | 22m            |
| <b>FK50100W</b> | 20           | 50m            |



| Product Code | Description                | Wattage | Lumen Output | Efficacy | Net Weight | Barcodes      |
|--------------|----------------------------|---------|--------------|----------|------------|---------------|
| FK2250W      | LED Festoon Kit 10-Way 22m | 50W     | 3500 lm      | 70 lm/W  | 2.2        | 5055807618922 |
| FK50100W     | LED Festoon Kit 20-Way 50m | 100W    | 7000 lm      | 70 lm/W  | 4.4        | 5055807618939 |

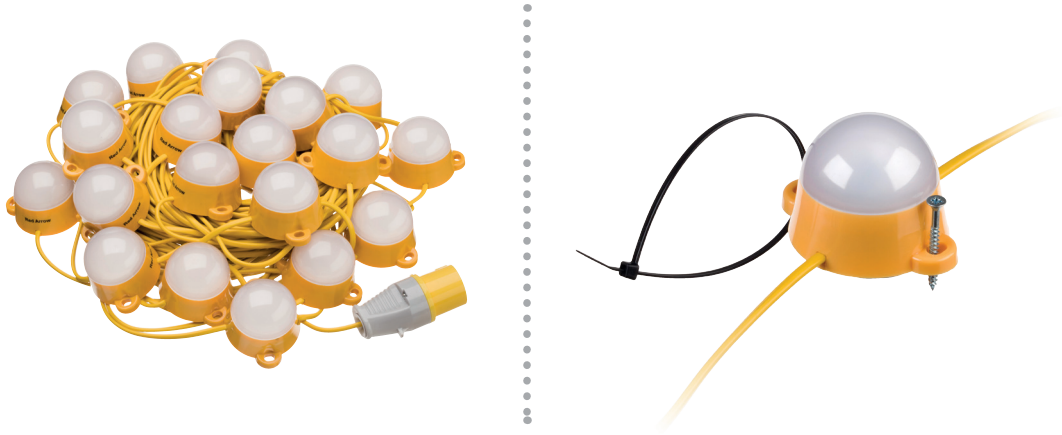

**Maximum Fittings Per Circuit**

| Automatic Circuit Breaker Type: | B10 | B13 | B16 | B20 | C10 | C13 | C16 | C20 |
|---------------------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| Rated Current:                  | 10A | 13A | 16A | 20A | 10A | 13A | 16A | 20A |
| Cable (mm):                     | 1.5 | 1.5 | 1.5 | 2.5 | 1.5 | 1.5 | 1.5 | 2.5 |
| FK2250W:                        | 10  | 16  | 20  | 24  | 14  | 20  | 28  | 34  |
| FK50100W:                       | 5   | 8   | 10  | 12  | 7   | 10  | 14  | 17  |

**Light Distribution Curve**

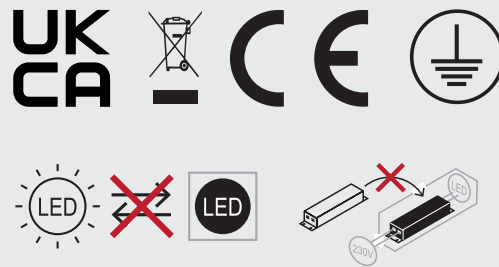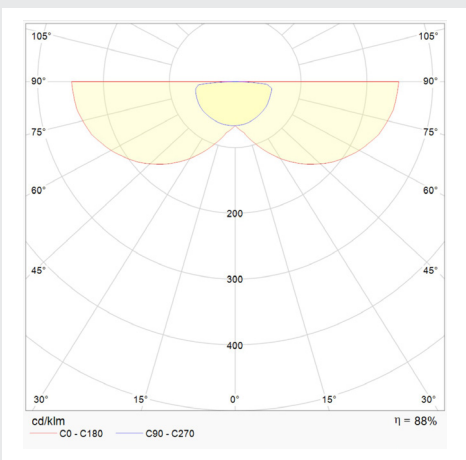

[www.redarrowelectrical.co.uk](http://www.redarrowelectrical.co.uk)