


Start Flood Flat without PIR

Start Flood Flat IP65 3000LM 840 Black
0050114



Product features

- The streamlined, durable, lightweight die-cast aluminium body makes Start Flood Flat a perfect choice for building facades, car parks, garages and construction areas. The product includes 1 m pre-wired stripped cable and fitting bracket for quick and easy installation and the universal mounting bracket allows wall or surface mounting with the possibility of vertical tilting. Black (RAL9017) housing, white reflector, 3000 lm, 27 W, 111 lm/W, 4000K, non dimmable, CRI>80, IP65, IK06, Class I, lifespan L70:B50: 90000 hrs, 123 x 156 x 28 mm (L x W x H). Weight: 0.51kg.

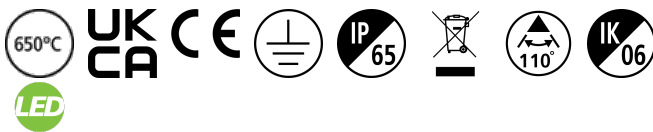

PRODUCT OVERVIEW

Product name	Start Flood Flat IP65 3000LM 840 Black
Technology	LED
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4579531
Warranty	3 years
Fixture luminous flux (lm)	3000
Luminaire efficacy (lm/W)	111
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1
Total power consumption (W)	27
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	Black
IP rating	IP65
IK rating	IK06
Product EAN number	5410288501147
Included lamp	SAX0000A_0000

DATA TABLE

General data

Product name	Start Flood Flat IP65 3000LM 840 Black
Technology	LED
General application	Residential & Consumer
Operating temperature range (°C)	-20°C - 40°C
ETIM Class	EC001744
E-number FI	4579531

Start Flood Flat without PIR

Start Flood Flat IP65 3000LM 840 Black
0050114

Warranty	3 years
----------	---------

Optical data

Fixture luminous flux (lm)	3000
Luminaire efficacy (lm/W)	111
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	110
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	27
Mains voltage (V)	220-240V~
Lamp power factor	0.9
Electrical protection	Class I
Dimmable	No
Drive current (mA)	60
Inrush Current (A)	19.6
Inrush Duration (µs)	390
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	16
Max. Luminaires per 13A C Breaker	20
Max. Luminaires per 16A C Breaker	26
Max. Luminaires per 20A C Breaker	32
Max. Luminaires per 10A B Breaker	10
Max. Luminaires per 13A B Breaker	12
Max. Luminaires per 16A B Breaker	15
Max. Luminaires per 20A B Breaker	19

Lifetime data

Lifespan L70 B50	90000
Lifespan L80 B50	73000
Lifespan L80 B20	47000

Physical data

Housing colour	Black
IP rating	IP65
IK rating	IK06
Nominal Product Length (mm)	123
Nominal Product Width (mm)	156
Nominal Product Height (mm)	28
Weight (kg)	0.51

Packaging

Single packaging type	Carton
-----------------------	--------

Start Flood Flat without PIR


Start Flood Flat IP65 3000LM 840 Black
0050114

Product EAN number	5410288501147
Packaging single length / height (cm)	16.5
Packaging single width (cm)	4.5
Packaging single depth (cm)	17.5
DUN14 (outer)	15410288501144
Units per outer package	6
Packaging outer length / height (cm)	30.0
Packaging outer width (cm)	18.0
Packaging outer depth (cm)	19.5

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

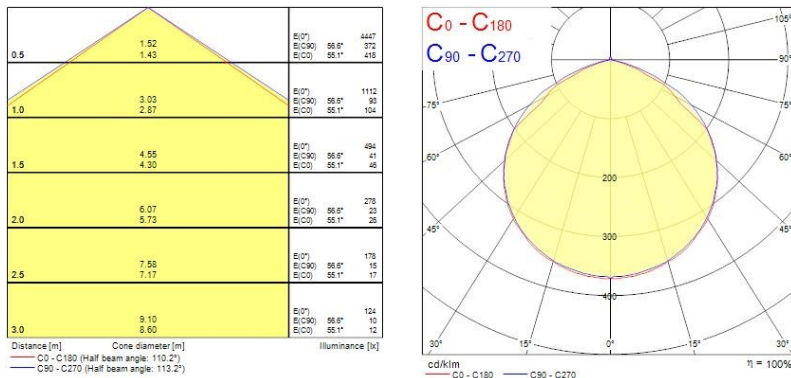

TECHNICAL DRAWINGS

