
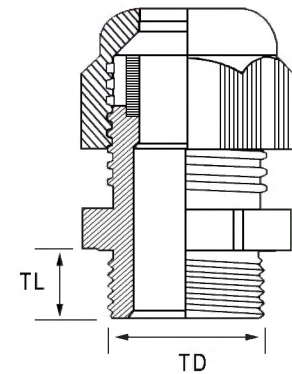


Cable Glands



Polyamide PG Cable Glands

Part No.*	Unit Of Supply	TD (mm)	TL (mm)	 (mm)	Clamping Range (mm)	Recom. Cap Tightening Torque (Nm)
CGPG7	Each	13	8	15	3.0 - 6.5	1.7
CGPG9	Each	16	8	19	4.0 - 8.0	2.5
CGPG11	Each	19	8	22	5.0 - 10.0	2.5
CGPG13.5	Each	21	9	2	6.0 - 12.0	2.5
CGPG16	Each	23	10	27	10.0 - 14.0	3.3
CGPG21	Each	29	11	33	13.0 - 18.0	5.0
CGPG29	Each	37	11	42	18.0 - 25.0	5.0
CGPG36	Each	47	13	53	22.0 - 32.0	12.0
CGPG42	Each	54	13	60	30.0 - 38.0	12.0
CGPG48	Each	59	14	65	34.0 - 44.0	12.0



Locknuts supplied separately - Part No. PLNPG (size) - (colour) e.g. PLNPG7-G

*** Specify colour required**

Standard colours: black (RAL 9005), dark grey (RAL 7001), light grey (RAL 7035), white (RAL 9003), red (RAL 53025), blue (RAL 5015)
(N.B colours limited on certain sizes)

Commercial TRS Range

Material: Polyamide 6 (halogen free) Trade name: Ultramid B.

Protection Class: IP54.

Part No.	Colour	Cable Range (mm)	Part No.	Colour	Cable Range (mm)
CG251B-PK10	Black	7.0 - 10.0	CG252B-PK10	Black	8.0 - 13.0
CG251W-PK10	White	7.0 - 10.0	CG252W-PK10	White	8.0 - 13.0
CG251R-PK10	Red	7.0 - 10.0	CG252R-PK10	Red	8.0 - 13.0

Pack Quantity: 10

Glands supplied with locknuts.

Pack Quantity: 10

