

APACLED2/60/CCT

Pace LED CCT Backlit Recessed Panel 29W



Features

High performance maintenance free LED panel

Suitable for installation in offices, educational buildings, retail and healthcare premises

Slimline design allows for installation into shallow ceiling voids

TPa as standard

Integral switch allows the installer a choice of 3000K, 4000K and 6500K colour temperature

Self-Test Panel Pod and Sensor Pod compatible

LED lifespan L90 52,000 hours

Dimmable and OCTO options available



Belfast: +44 (0) 2890 773750

General Information


Lamp Type	LED
IP Rating	IP44
Class Protection	2
Internal / External	Internal
Warranty (Years)	5
CE Mark	Yes
Length (mm)	595
Width (mm)	595
Height (mm)	36
Accessories	AIRMLED/POD/3NM/ST, AIRMLED/POD/MWS, APACLED/SK, AERMLED/60/SMF

Technical Information

Wattage	29W
Lumens Delivered	3300lm (Cool White), 3100lm (Warm White), 3250lm (Daylight)
Lm/W	114lm (Cool White), 107lm (Warm White), 112lm (Daylight)
CRI	Ra 80
ССТ	3000K/4000K/6500K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-10°C to 45°C

Datasheet generated from https://onetimepim.com last updated Friday, June 19, 2020 3:05:40 PM



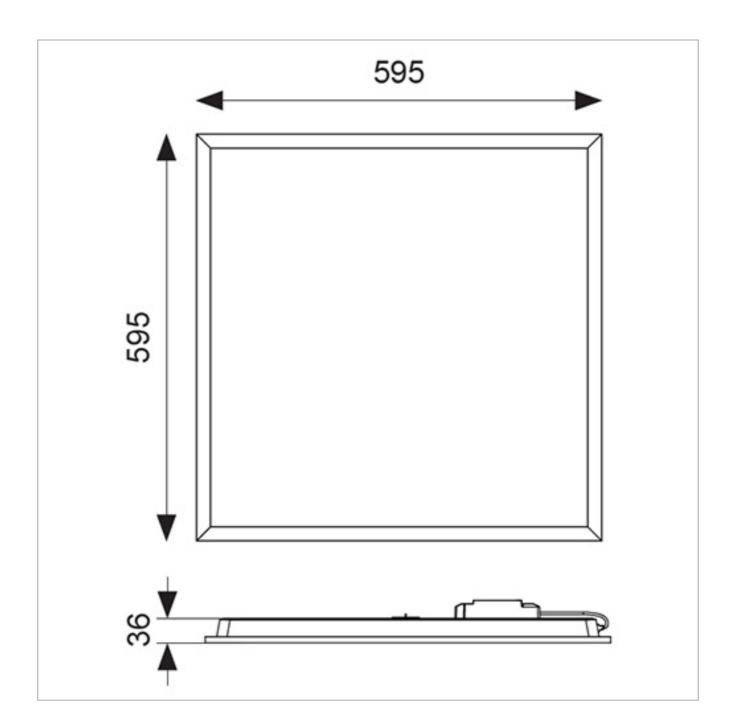



Belfast: +44 (0) 2890 773750