

## R3D3015W

### 30x15mm White 3m Self Adhesive Length

30x15mm white 3m mini trunking offers a stylish & quick install solution to route surface-mounted cables.

The ½ round shape can blend above skirting boards, while offering a modern solution for vertical cable drops and runs across ceilings.


This versatile profile is popular for 2x 2.5mm T&E, 2x 1.5mm 2c FP cables, 2x broadband cable and 3x cat-5 combinations.

Available with a range of accessories for perfect finish.



## Technical Specification

Production Method	Produced in one single process by extrusion
Bullet 1	Unique stylish 'D-Line' appearance
Material	PVC base & lid Light weight, easy to handle & cut Self-extinguishing Can be drilled Elastomer hinge Effectively bonds base & lid - lid cannot detach Impact absorbing Can be opened & closed thousands of times
Bullet 2	Self-adhesive, or can be drilled & screw-fixed
Available Colours	White, Magnolia, Black, Aluminium Effect, Oak Effect
Bullet 3	Clip-Over & Smooth-Fit accessories for perfect finish
UV Stabilised	Will not discolour or turn brittle in sunlight
Bullet 4	Adaptors available to interface 30x15mm trunkings with surface boxes, flat surfaces & pattresses
Operating Temperature	Stable between -30°C up to +60°C
Bullet 5	Can contain Safe-D U-Clip 30 to secure cables, as BS7671
Dimensions	External dimensions 30mm x 15mm (W x H)
Bullet 6	Patented hinge & click-lock lid
Length (mm)	3000
Bullet 7	PVC - easy to cut
Width (mm)	30
Height (mm)	15

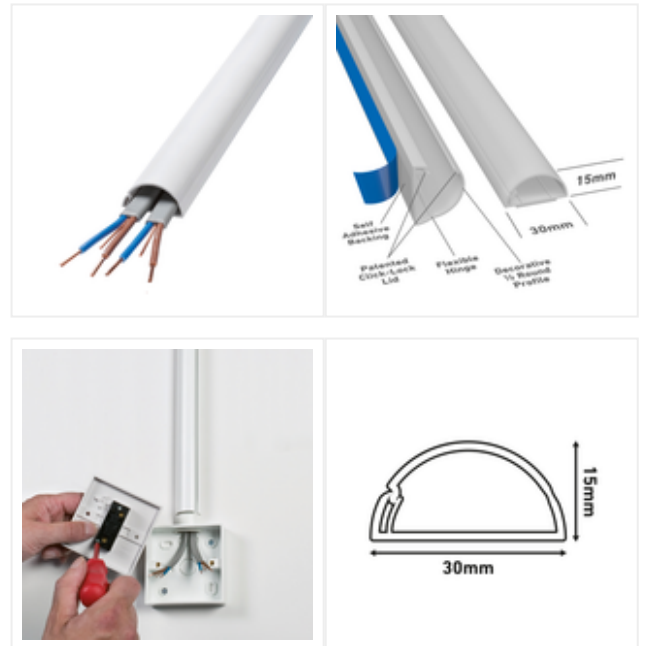

Paintable	Scuff using gentle abrasive such as sandpaper, so paint keys for best results
Weight	0.115 kg per metre
Weight kg	0.36
Capacity	If containing 240v cords leave 45% of internal capacity for air circulation
Quality Approvals	BS EN 50085 - 1:2005 Part 1 SGS Registration ELS 185841/2/C/AB/16
Lengths M	32
Design	½ round designNo sharp edgesEnables subtle aestheticsBlends above skirting
Additional	TapeFoam backed 1mm thickEffective on clean dry surfacesCaution, can spoil surfaces on removal