



# **MASTER PL-C 2 Pin**

## MASTER PL-C 18W/840/2P 1CT/5X10BOX

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 4 parallel narrow fluorescent tubes

### Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General information		Chromaticity coordinate Y (nom.)	
Cap base	G24D-2 [ G24d-2]	Correlated Colour Temperature (Nom)	4
Life to 10% failures (nom.)	6500 h	Luminous efficacy (rated) (nom.)	67 l
Life to 50% failures (nom.)	10000 h	Colour rendering index (nom.)	80
LSF 2000 h Rated	99 %	LLMF 2000 h Rated	92 %
LSF 4000 h Rated	98 %	LLMF 4000 h Rated	87 %
LSF 6000 h Rated	92 %	LLMF 6000 h Rated	83 %
LSF 8000 h Rated	78 %	LLMF 8000 h Rated	81 %
	Sphere		
		Operating and electrical	
Light technical		Power (Rated) (Nom)	18.3 W
Colour Code	840 [ CCT of 4,000 K]	Lamp current (nom.)	0.230 A
Luminous flux (nom.)	1200 lm		
Luminous flux (rated) (nom.)	1200 lm	Temperature	
Colour designation	Cool White (CW)	Design temperature (nom.)	28 °C
Chromaticity coordinate X (nom.)	0.38		


G 🛱

## **MASTER PL-C 2 Pin**

Controls and dimming	
Dimmable	No
Mechanical and housing	
Cap-base information	2P
Approval and application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	1.4 mg
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	19 kWh
	423284

Product data			
Full product code	871150062093470		
Order product name	MASTER PL-C 18W/840/2P 1CT/5X10BOX		
EAN/UPC – product	8711500620934		
Order code	62093470		
Local order code	18PLC8402PIN		
SAP numerator – quantity per pack	1		
Numerator – packs per outer box	50		
SAP material	927905784040		
Net Weight (Piece)	57.800 g		
ILCOS code	FSQ-18/40/1B-I-G24d=2		

## Dimensional drawing




 Product
 D (max)
 D (max)
 A (max)
 B (max)
 C (max)

 MASTER PL-C 18W/84002
 27.1 mm
 27.1 mm
 109.5 mm
 128.0 mm
 50.4 mm


 1CT/5X10BOX
 27.1 mm
 27.1 mm
 27.1 mm
 109.5 mm
 128.0 mm
 50.4 mm

#### MASTER PL-C 18W/840/2P 1CT/5X10BOX

## Photometric data

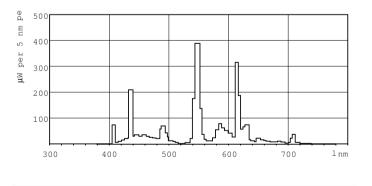


Lightcolour /840

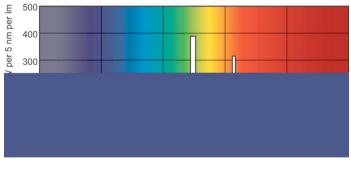


Lightcolour /840

## **MASTER PL-C 2 Pin**


Lifetime

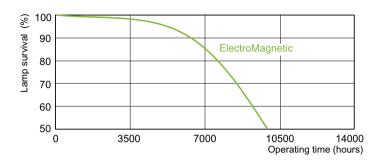



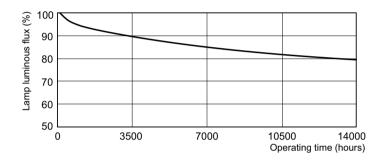

LDLM\_PLC2P\_0001-Lumen maintenance diagram



LDLE\_PLC2P\_0002-Life expectancy diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.