


Product Code: SIN036BK

Description: 13A 2 Gang Double Pole Switched Socket Outlet Insert

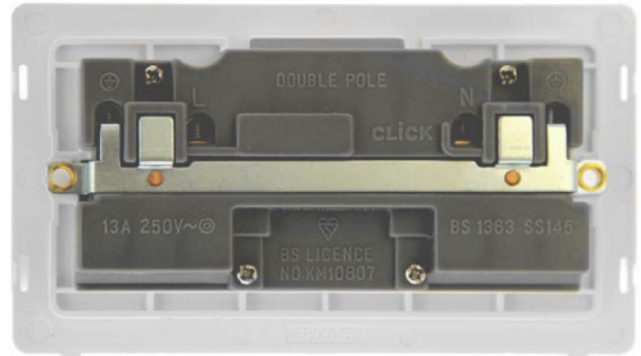

Representative Image

General Information

| | |
|---------------------------------------|--|
| Dimensions | 142.5mm (W) x 82.5mm (H) x 2.5mm (D) |
| Insert Finish | Black Insert |
| Cover Plate Finishes Available | BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), BK (Matt Black), PW (Polar White) & RD (Red) |
| Materials | Insert: Polycarbonate Rear Housing: Urea Terminals: Brass Terminal Screws: Steel & Yellow Passivated Contacts: Silver "on-lay" Copper / Brass Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel |
| Maximum Voltage | 250V~ 50Hz |
| Load Rating | 13A |
| Plate Fixing Centres | 120.6mm |
| Terminal Size | 5mmø |
| Terminal Torque | 2.5Nm |
| Terminal Capacity | 4 x 2.5mm ² , 2 x 4mm ² |
| Double Pole | Yes |
| Twin Earth Terminals | Yes |
| Ingress Protection | IP20 |
| Back Box Depth | 35mm Minimum |
| Operational Temperature | -5°C to +40°C |
| Warranty | 10 Years |
| Standards | BS 1363-2: 2016 +A1: 2018 |

Additional Information


Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Product Code: SIN036BK


Description: 13A 2 Gang Double Pole Switched Socket Outlet Insert

Compatible Cover Plates


| | |
|---------------------------------------|--|
| Plate Dimensions | 146mm (W) x 86mm (H) x 4mm (D) |
| Cover Plate Finishes Available | BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), BK (Matt Black), PW (Polar White) & RD (Red) |
| Materials: | Decorative: Stainless Steel, Black, Polar White & Red: Polycarbonate |

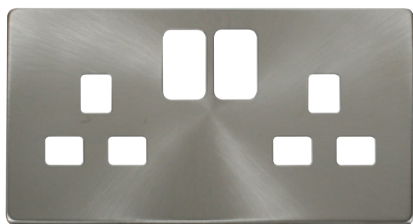


SCP436BS

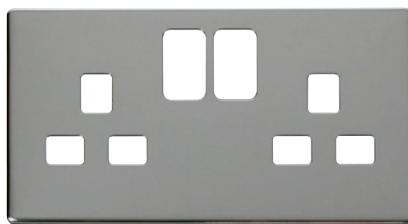


SCP436CH

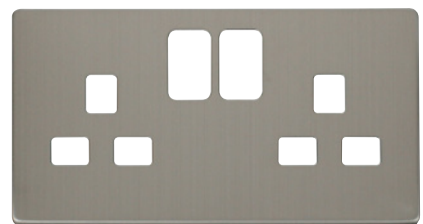


SCP436SS

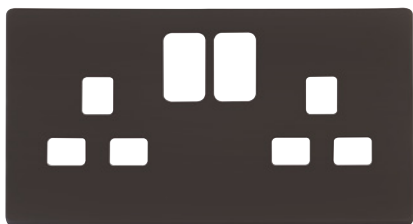

SCP436BK

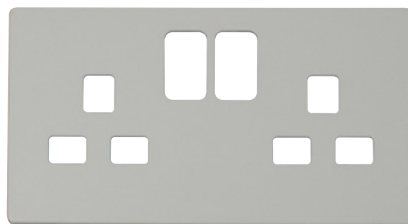

SCP436PW

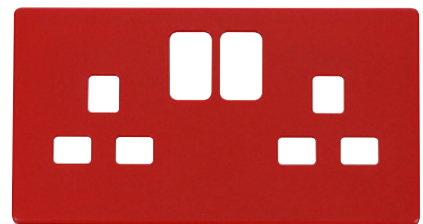

SCP436RD