
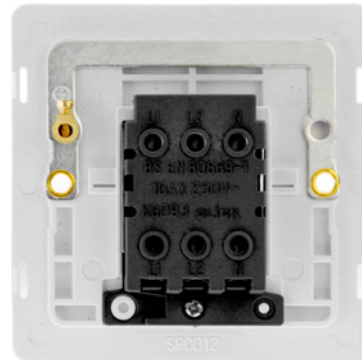


Product Code: SIN020BK

Description: 10A 3 Pole Fan Isolation Plate Switch Insert

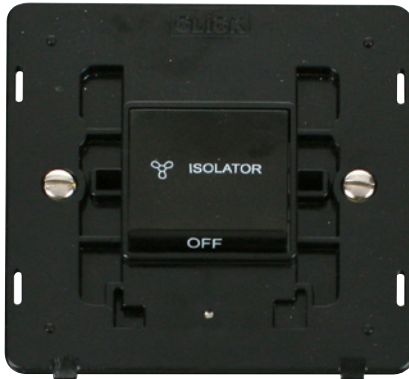

Representative Image

### General Information

<b>Dimensions</b>	82.5mm (W) x 82.5mm (H) x 2.5mm (D)
<b>Insert Finish</b>	Black Insert & Switch
<b>Cover Plate Finishes Available</b>	BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), BK (Matt Black), PW (Polar White) & RD (Red)
<b>Materials</b>	Insert: Polycarbonate Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Contacts: Silver "on-lay" Copper / Brass Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel
<b>Maximum Voltage</b>	250V~ 50Hz
<b>Load Rating</b>	10AX (Suitable for Inductive Loads)
<b>Plate Fixing Centres</b>	60.3mm
<b>Terminal Size</b>	3.5mmø
<b>Terminal Torque</b>	0.4Nm
<b>Terminal Capacity</b>	4 x 1.5mm <sup>2</sup> or 2 x 2.5mm <sup>2</sup>
<b>Triple Pole</b>	Yes
<b>Ingress Protection</b>	IP20
<b>Back Box Depth</b>	25mm Minimum
<b>Operational Temperature</b>	-5°C to +40°C
<b>Warranty</b>	10 Years
<b>Standards</b>	BS EN 60669-1:1999 +A1:2002 +A2:2008

### Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Product Code: SIN020BK

Description: 10A 3 Pole Fan Isolation Plate Switch Insert

**Compatible Cover Plates**

Plate Dimensions	86mm (W) x 86mm (H) x 4mm (D)
Cover Plate Finishes Available	BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), BK (Matt Black), PW (Polar White) & RD (Red)
Materials:	Decorative: Stainless Steel, Black, Polar White & Red: Polycarbonate



SCP402BS



SCP402CH




SCP402SS



SCP402BK



SCP402PW



SCP402RD