
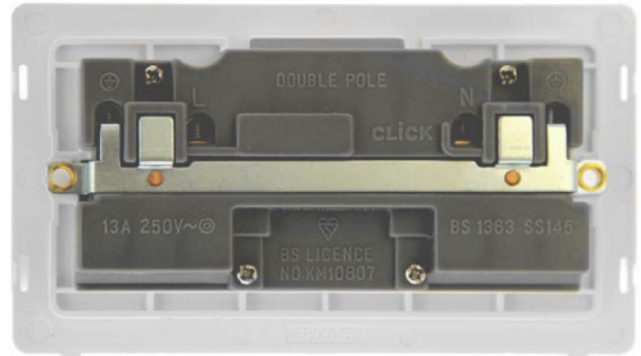


Product Code: SIN536BKBS

Description: 13A Ingot 2 Gang Double Pole Switched Socket Outlet Insert

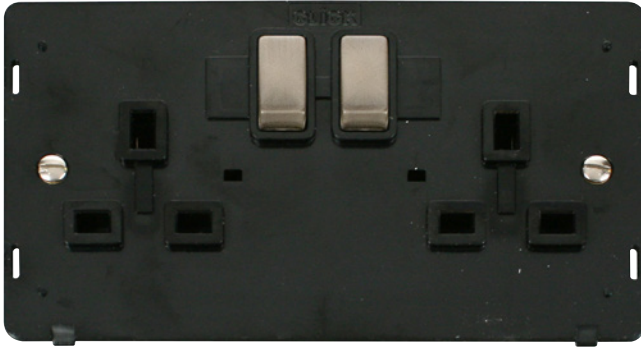

Representative Image

General Information

| | |
|---------------------------------------|---|
| Dimensions | 142.5mm (W) x 82.5mm (H) x 2.5mm (D) |
| Insert Finish | Black Insert With Brushed Stainless Switches |
| Cover Plate Finishes Available | BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), BK (Matt Black), PW (Polar White) & RD (Red) |
| Materials | Insert: Polycarbonate Rear Housing: Urea Switch Cover: Stainless Steel Terminals: Brass Terminal Screws: Steel & Yellow Passivated Contacts: Silver "on-lay" Copper / Brass Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel |
| Maximum Voltage | 250V~ 50Hz |
| Load Rating | 13A |
| Plate Fixing Centres | 120.6mm |
| Terminal Size | 5mmø |
| Terminal Torque | 2.5Nm |
| Terminal Capacity | 4 x 2.5mm ² , 2 x 4mm ² |
| Double Pole | Yes |
| Twin Earth Terminals | Yes |
| Ingress Protection | IP20 |
| Back Box Depth | 35mm Minimum |
| Operational Temperature | -5°C to +40°C |
| Warranty | 10 Years |
| Standards | BS 1363-2: 2016 +A1: 2018 |

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Product Code: SIN536BKBS


Description: 13A Ingot 2 Gang Double Pole Switched Socket Outlet Insert

Compatible Cover Plates


| | |
|--------------------------------|--|
| Plate Dimensions | 146mm (W) x 86mm (H) x 4mm (D) |
| Cover Plate Finishes Available | BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), BK (Matt Black), PW (Polar White) & RD (Red) |
| Materials: | Decorative: Stainless Steel, Black & Polar White: Polycarbonate |



SCP436BS

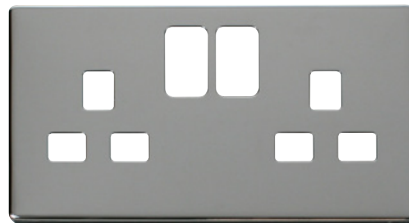


SCP436CH

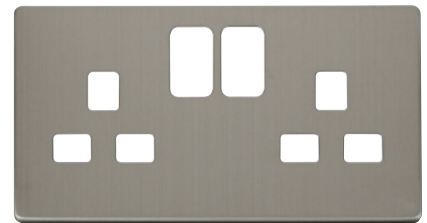


SCP436SS



SCP436BK

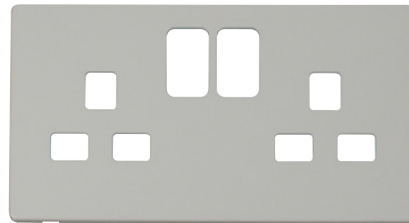

SCP436PW

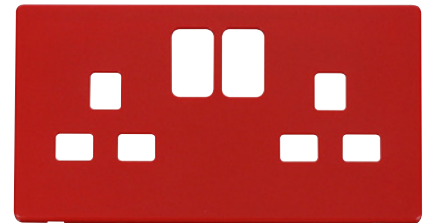

SCP436RD